

*版权归塔奥帝诺智能科技(东莞)有限公司所有,严禁翻版和影印

*Copyright is owned by TODN, piracy and photocopying are strictly prohibited.

*本公司产品已申请中国专利,严禁仿制, 违者负法律责任。

*Any copying or printing is strictly forbidden. *All products have been patented in China,

*2021年1月制

*Printed in Jan. 2021



塔奥帝诺智能科技(东莞)有限公司

COMPANY PROFILE OF TODN

地址: 东莞市塘厦镇大坪长塘街10号

ADD: No.10 Changtang Street, Daping, Tangxia Town,

DongGuan City, GuangDong Prouince, China.

T: 0769-82099818

F: 0769-81775695



COMPANY PROFILE OF TODN

塔奥帝诺智能科技(东莞)有限公司简介

塔奥帝诺, 欧洲百年品牌CIFIAL(斯飞奥)旗下品牌, 传承欧洲经典元素, 并将其与现代工艺完美结合, 艺术的美感揉合细腻
的触感, 跨越经典、优雅之疆界, 彰显个性、时尚之风格, 满足越来越多高品位消费人群精致生活的需求。

我们一直在努力改变, 塔奥帝诺不断发展和超越自我, 坚持精益求精的技术, 紧扣时代潮流, 不断推出质地优良、风格独特的
门窗五金精品。

我们一直没有改变, 塔奥帝诺始终追求健康时尚的品味, 让艺术融于生活。

TODN, a brand under the century-old European brandCIFIAL, Inherit the classic elements of Europe and combine
them perfectly with modern craftsmanship. The artistic beauty is blended with delicate touch, crossing the borders of
classics and elegance, showing individuality and fashion style, satisfying more and more The more high-grade
consumer groups demand a refined life.

We have been working hard to change, TODN continues to develop and surpass ourselves, adhere to the technology of
excellence, and keep up with the trend of the times. We continue to introduce home improvement hardware products with
excellent texture and unique style.

We have not changed, TODN has always pursued healthy and fashionable tastes, and let art be integrated into life.



CATALOG

目录

1、产品特点和保养说明	00---02
Product features and maintenance instructions	
2、内平开下悬系列	03---08
Turn-and-Tilt Window Series	
3、外平开窗纱一体系列	09---18
Open-out Side Hung Window With Screen Window Series	
4、内平开窗纱一体系列	19---20
Open-in Side Hung Window With Screen Window Series	
5、平开门系列	21---22
Side Hung Door Series	
6、窗执手	23---28
Window Handle	
7、门执手	29---29
Door Handle	
8、滑撑、合页	30---37
Friction Stay&Pivot hinge	
9、传动器	38---42
Transmitter	
10、四件套、防坠器	43---51
Four-piece suit& Fall arrester	
11、门锁、锁面板	52---56
Door Lock&Locking Plate	

塔奥帝诺产品特点与维护保养

TODN Product Features and Maintenance Instructions

一、产品特点

Features

- 1、时尚美观

Fashionable and beautiful

意大利设计美学和工匠精神完美结合,氧化、电镀等工艺,给人无与伦比的高层次享受。

The perfect combination of Italian design aesthetics and craftsmanship, oxidation, electroplating and other processes, give people an unparalleled high-level enjoyment.
- 2、静音

Mute

每个组件的构成都是以静音顺滑为标准设计,给用户一个安静舒适的环境。

The composition of each component is designed to be silent and smooth, giving users a quiet and comfortable environment.
- 3、顺滑

Smooth

联动装置系统使用过程中十分顺滑,组件和组件之间的结构精密配合,大大提升了用户体验。

The linkage device system is very smooth in use, and the components and the structure of the components are precisely matched, which greatly improves the user experience.
- 4、安全性高

High security performance

工字型锁块和蘑菇头锁点设计,大大提高了窗户的防盗防撬性能。

The I-shaped lock block and mushroom head lock point design greatly improve the anti-theft and anti-pry performance of the window.
- 5、高品质

High quality

高耐候性和高耐腐蚀性尽显尊贵不凡的品质,所有配件各项性能均领先行业标准。

High weather resistance and high corrosion resistance fully demonstrate the distinguished quality, and all the performance of all accessories are leading industry standards.
- 6、安装方便快捷、操作方便

Easy to install and easy to operate

夹持式安装,精准定位,提高效率,降低劳动成本。

Clamping installation, precise positioning, improve efficiency and reduce labor costs.
- 7、标准化和系列化

Standardization and serialization

使门窗制造企业和建筑公司能够快速安装。

Enable door and window manufacturing companies and construction companies to quickly install.
- 8、适用性强

Strong applicability

可用于目前市场上常用的铝合金家装型材。

It can be matched with aluminum home decoration profiles commonly used in the market.

二、产品保养及维护说明

product maintenance instructions

- 1、产品在安装前请阅读安装说明,并按安装说明安装,安装结束后确保各产品可以正常工作。

Please read the installation instructions before installing the products, and install them according to the installation instructions. After the installation, confirm that the products can work normally.
- 2、产品在正常使用时各活动构件和摩擦机构应定期检修并适当加注润滑油,并确保清洁,无阻塞现象,若发现有紧固螺钉松动或磨损等情况应及时修理或更换,以免影响产品的正常使用。

When the product is in normal use, each movable component and friction mechanism should be regularly inspected and properly filled with lubricating oil. Make sure to keep the product clean and free from obstruction. If the fastening screws are found to be loose or worn, they should be repaired or replaced in time. So as not to affect the normal use of the product.
- 3、产品每年至少进行一次检修和保养工作。


The product should be inspected and maintained at least once a year.
- 4、严禁使用含有腐蚀性的化学剂(如丙酮、二甲苯等)对产品进行清洁、护理。

It is strictly prohibited to use corrosive chemicals (such as acetone, xylene, etc.) to clean and maintain for the product.
- 5、门窗长时间使用后,出现掉角、下垂、缝隙过大等异常情况,可通过五金件的调节功能改善。

After the doors and windows are used for a long time, abnormal situations such as corners, sagging, and excessive gaps occur, which can be improved by the adjustment function of the hardware products.

IND100 隐藏式内平开下悬系列
IND100 Concealed Turn-and-Tilt Window Series

实现两种微通风状态
Achieve two micro-ventilation states

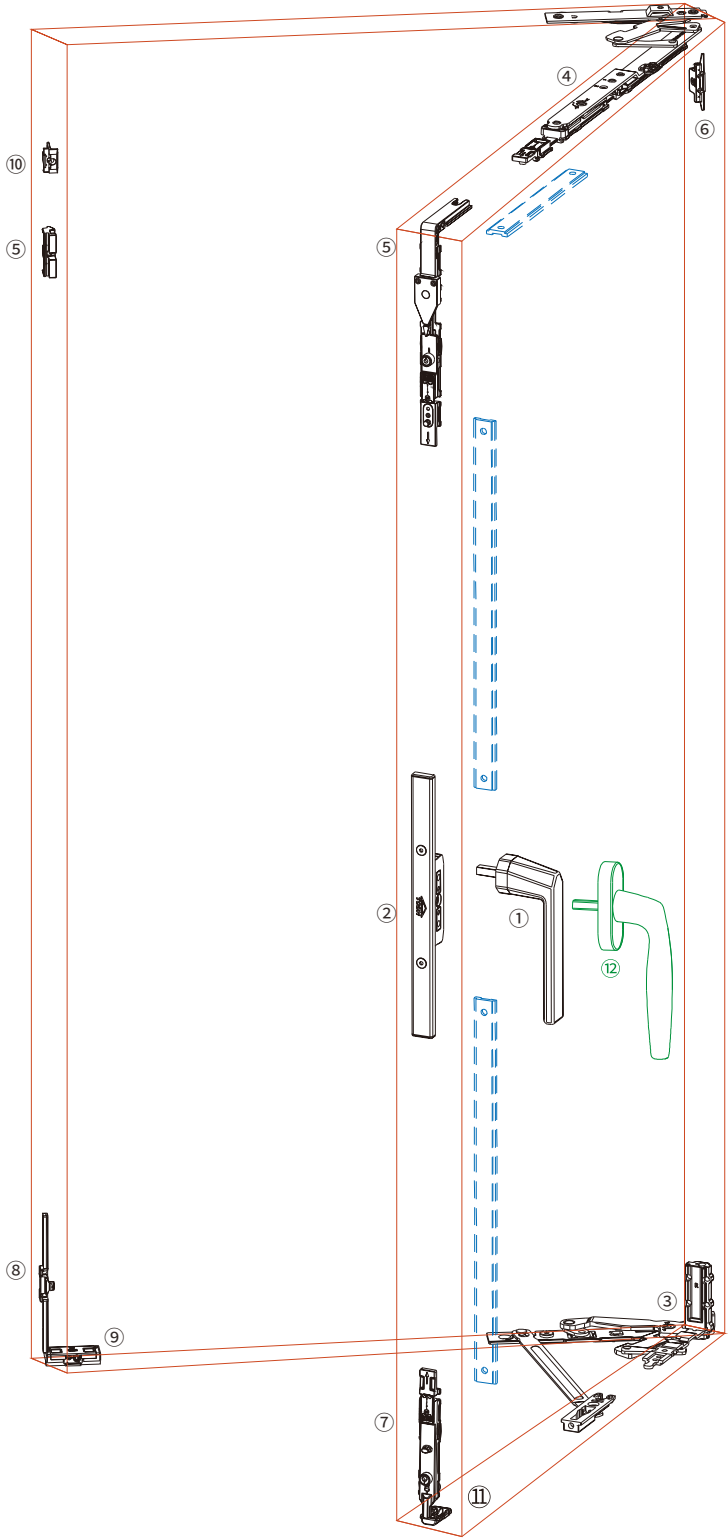

专利产品
Patented product

IND100 隐藏式内平开下悬系列
IND100 Concealed Turn-and-Tilt Window Series

序号/No.	名称/Name	型号/Code	数量/QTY	备注/Mark
1	无基座执手 Handle without base	IH00525	1	方钢外露25mm Exposed spindle length 25mm
2	传动器 Transmitter	IAG13	1	中心距13mm Center distance13 mm
3	下合页 Bottom hinge	IXH100R	1	分左右(含限位器) Left&Right (Include limiter)
4	上合页拉杆 Upper hinge connector rod	ITDS01R	1	分左右 Left&Right
5	微通风转角器 Micro ventilation corner	ICD01	1	
6	锁座 Locking plate	IPDI01	1	
7	翻转支撑 Overturn Supporter	ICDT01	1	
8	防脱器 Fall arrester	IPDS01	1	
9	支撑座 Supporting block	ISCT03	1	
10	锁块 Locking plate	ILP02	1	
11	垫块 Cushion block	ICB02	1	
12	执手 Handle	IH00225	1	选配, 方钢外露25mm Optional,Exposed spindle length 25mm

配置说明：
Configuration Instruction：


- 1、本配置适用窗扇槽口高度为625mm-1900mm,窗扇槽口宽度450mm-720mm。窗高大于1300mm时,需增加转接杆。
This configuration is suitable for window sash notch height from 625mm to 1900mm, and window sash notch width from 450mm to 720mm.Connector rod need be increased when the window height is bigger than 1300mm.
- 2、合页最大承重110kg,建议窗型比(高/宽)保持在1.5:1。
The maximum load-bearing capacity of the hinge is 110kg, and it is recommended that the window ratio (height/width) be maintained at 1.5:1.
- 3、窗扇最大开启角度为180°。
The maximum opening angle of the window sash is 180°.

IND100 隐藏式内平开下悬系列特点

IND100 The features for Concealed Turn-and-Tilt Window Series

一、微通风转角器特点


Features of micro ventilation corner device

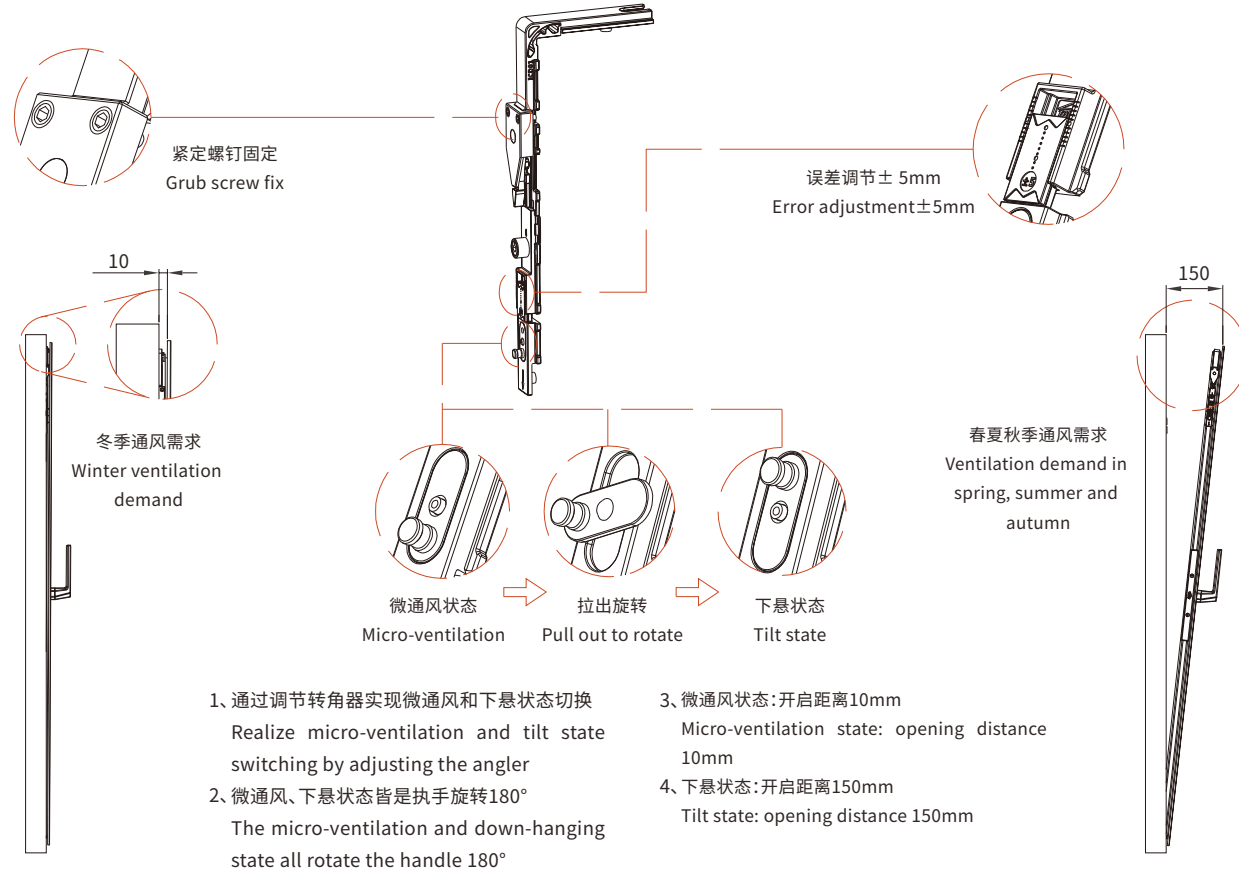

二、传动器特点

Transmitter features


1. 静音组件 (连接铝杆)
Mute component (connected to aluminum rod)
2. 夹持式固定
Clip-on fixing
3. 防斜拉
Anti-slanting
4. 90° 初始定位
 90° Initial positioning
5. 适配无基座或有基座执手
Adapt to handle without base or with base
6. 中心距 13mm
Center distance 13mm



三、翻转支撑特点

Overturn supporter


1. 静音组件 (连接铝杆)
Mute component (connected to aluminum rod)
2. 静音块保证传动静音
Mute block ensures the transmission is silent
3. 偏心可调 $\pm 1\text{mm}$
Eccentricity adjustable $\pm 1\text{mm}$
4. 误差调节 $\pm 5\text{mm}$
Error adjustment $\pm 5\text{mm}$

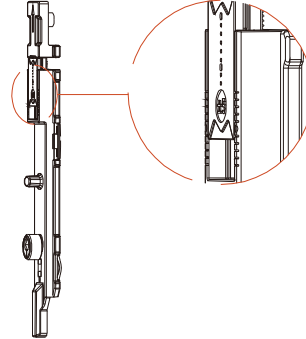

四、支撑座特点

Supporting block fetures


1. 前后调节 1.5mm
1.5mm forward and backward adjustment

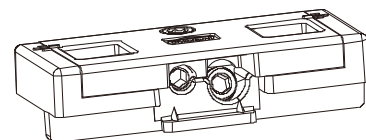

五、上合页拉杆特点

Features of upper hinge connector rod

1. 静音组件 (连接铝杆)、静音块保证传动静音
Mute components (connected with aluminum rods) and mute blocks to ensure transmission mute
2. 挂钩式预定位+夹持式固定
Hook type pre-positioning + clamp type fixing
3. 下悬开启距离 150mm
Tilt opening distance 150mm

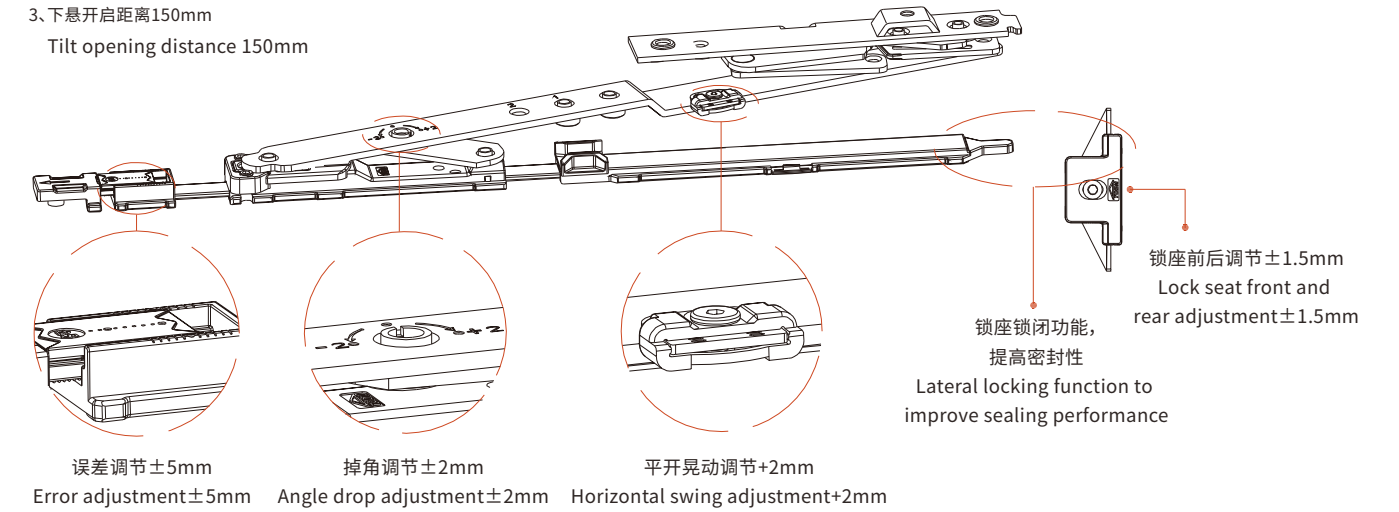

六、下合页特点/Features of bottom hinge

180° 开启、平框型材。/ 180° opening, flat frame profile.


向上调节 $+3\text{mm}$ / Adjust up $+3\text{mm}$

侧向夹持反顶固定 / Side clamping and reverse top fixing

前后调节 $\pm 0.6\text{mm}$ / Front and back adjustment $\pm 0.6\text{mm}$

左右调节 $\pm 1.5\text{mm}$ / Left and right adjustment $\pm 1.5\text{mm}$


夹持式固定 / Clip-on fixing

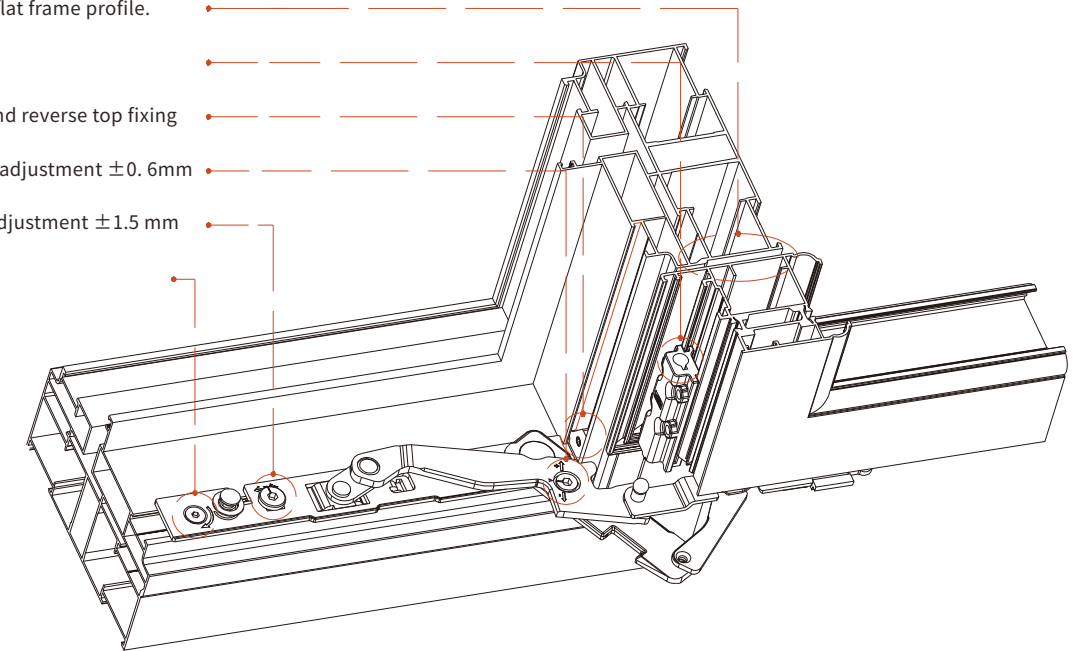

限位器特点


Limiter features

1. 按压式快速安装
Push-type quick installation
2. 90° 限位
 90° positioning

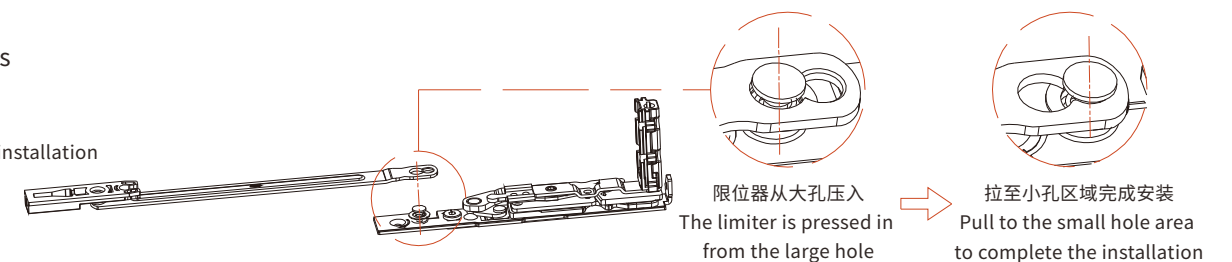

IND200 隐藏式内平开下悬系列

IND200 The Features for Concealed Turn-and-Tilt Window Series

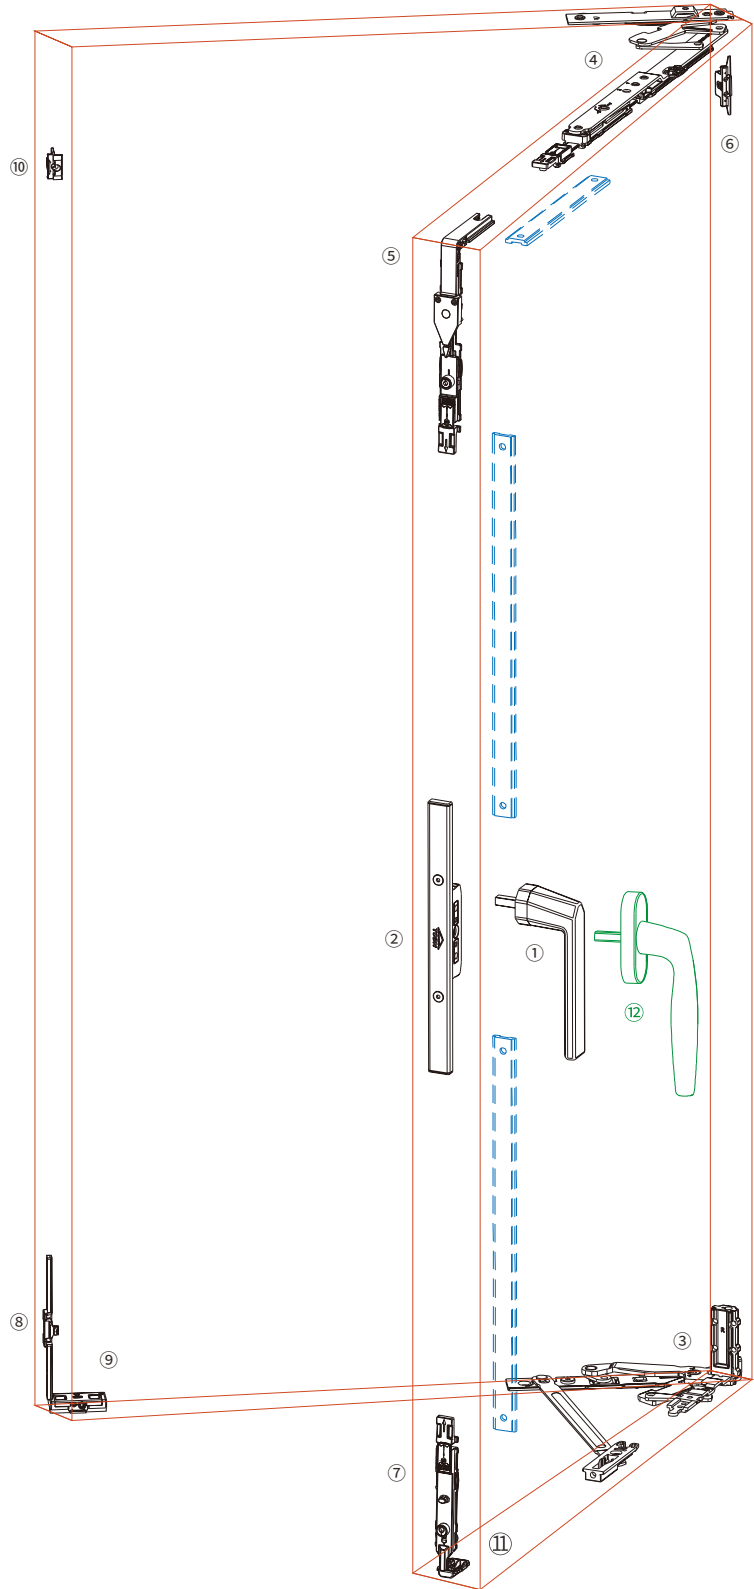

专利产品
Patented product

IND200 隐藏式内平开下悬系列

IND200 The Features for Concealed Turn-and-Tilt Window Series



序号/No.	名称/Name	型号/Code	数量/QTY	备注/Mark
1	无基座执手 Handle without base	IH00525	1	方钢外露25mm Exposed spindle length 25mm
2	传动器 Transmitter	IAG13	1	中心距13mm Center distance 13mm
3	下合页 Bottom hinge	IXH100R	1	分左右(含限位器) Left&Right (Include limiter)
4	上合页拉杆 Upper hinge connector rod	ITDS01R	1	分左右 Left&Right
5	转角器 Corner device	ICD02	1	
6	锁座 Locking plate	IPDI01	1	
7	翻转支撑 Overturn Supporter	ICDT01	1	
8	防脱器 Fall arrester	IPDS01	1	
9	支撑座 Supporting block	ISCT03	1	
10	锁块 Locking plate	ILP02	1	
11	垫块 Cushion block	ICB02	1	
12	执手 Handle	IH00225	1	选配, 方钢外露25mm Optional, Exposed spindle length 25mm

配置说明：
Configuration Instruction

- 1、本配置适用窗扇槽口高度为610mm-1900mm,窗扇槽口宽度450mm-720mm。窗高大于1300mm时,需增加转接杆。
This configuration is suitable for window sash notch height from 610mm to 1900mm, and window sash notch width from 450mm to 720mm.Connector rod need be increased when the window height is bigger than 1300mm.
- 2、合页最大承重110kg,建议窗型比(高/宽)保持在1.5: 1。
The maximum load-bearing capacity of the hinge is 110kg, and it is recommended that the window ratio (height/width) be maintained at 1.5:1.
- 3、窗扇最大开启角度为180°。
The maximum opening angle of the window sash is 180°.

IW100 外平开窗纱一体系列

IW100 Open-out Side Hung Window With Screen Window Series

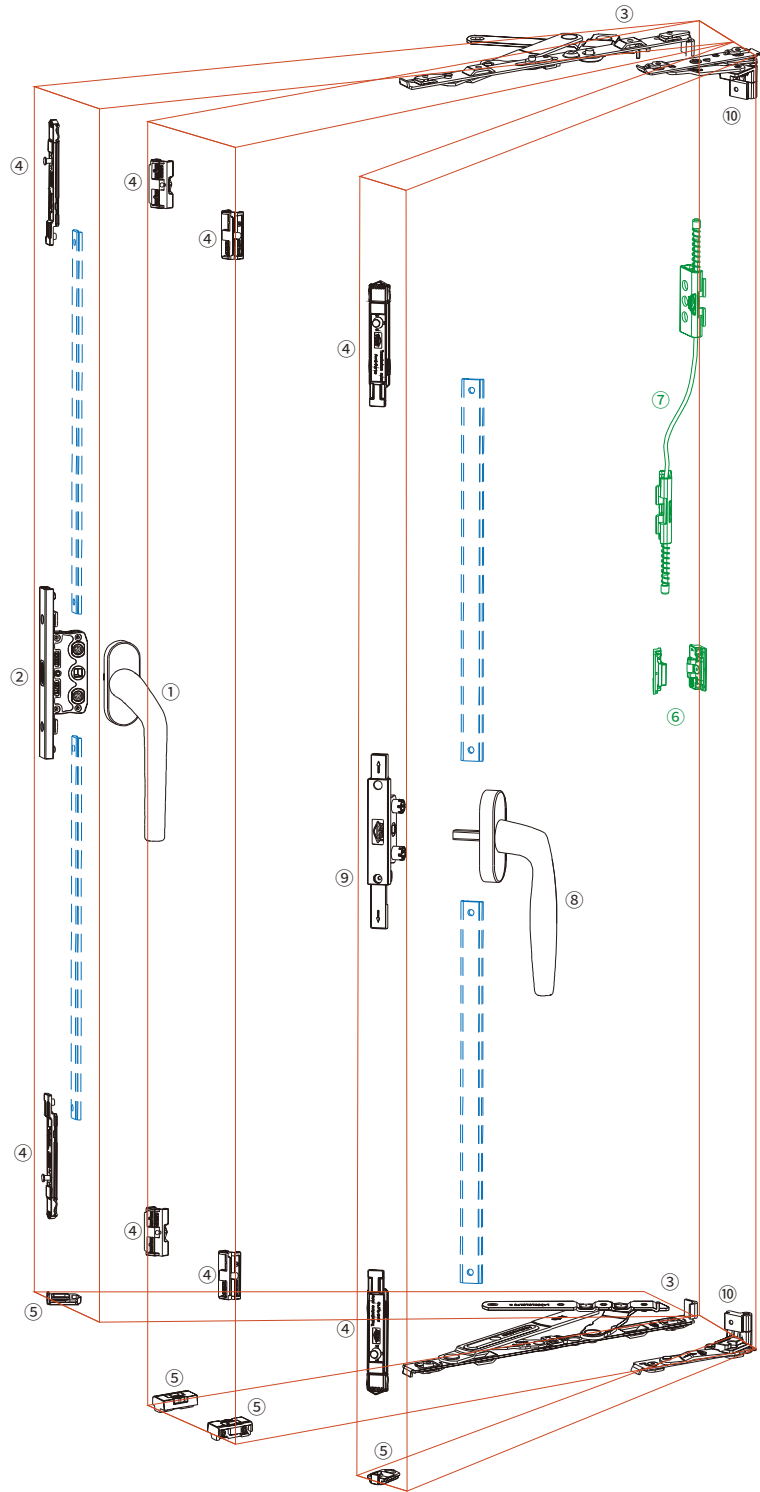

IW100 外平开窗纱一体系列

IW100 Open-out Side Hung Window With Screen Window Series

玻璃窗/Glass window				
序号/No.	名称/Name	型号/Code	数量/QTY	备注/Mark
1	执手 Handle	IHS00340R	1	分左右,方钢外露40mm Left&Right, Exposed spindle length 40mm
2	传动器 Transmitter	IDG02	1	中心距23.5mm Center distance 23.5mm
3	滑撑 Friction stay	IFS200\LR	1	
4	单锁点四件套 Single lock four-piece set	ISLF05	1	
5	支撑组件 Support components	ISCT02	1	
6	中间锁块 Mid locking plate	IMLP01	1	选配 Optional
7	防坠器 Fall arrester	ISDP01R	1	分左右,选配 Left&Right, Optional

纱窗/Screen window				
序号/No.	名称/Name	型号/Code	数量/QTY	备注/Mark
8	执手 Handle	IH00225	1	方钢外露25mm Exposed spindle length 25mm
9	传动器 Transmitter	IDG01	1	中心距15mm Center distance 15mm
4	单锁点四件套 Single lock four-piece set	ISLF05	1	
5	支撑组件 Support components	ISCT02	1	
10	纱窗隐藏式合页 Concealed hinge for screen window	ICH200\LR	1	

配置说明:
Configuration instructions


- 1、本配置适用窗扇高度为1500mm,窗扇宽度650mm以内的窗型。
This configuration is suitable for window sash height of 1500mm and window sash width within 650mm.
- 2、滑撑最大承重60kg,建议窗型比(高/宽)保持在1.5: 1。
The maximum load-bearing capacity of sliding brace is 60kg, and it is recommended that the window ratio (height/width) be maintained at 1.5:1
- 3、纱窗合页最大承重15kg。
The maximum load-bearing capacity of the screen hinge is 15kg
- 4、本配置适用C槽型材。
This configuration is suitable for C-groove profiles.

滑撑安装说明


Installation instruction of Friction stay

一、扇安装 sash part fix


1. 托臂穿入c槽, 至定位点与型材接触, 达到最佳安装效果;
The arm slides into the c-groove until the positioning point is in contact with the profile to achieve the best installation effect;
2. 通过紧定螺钉顶紧型材(避角码), 其它孔位通过螺钉固定。
Tighten the profile by tightening screws (to avoid corners), and fix other holes by screws.

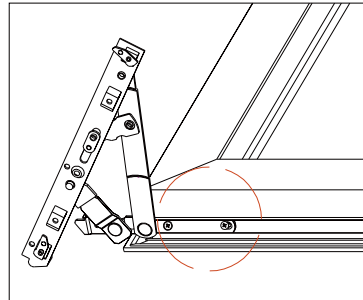

(穿插式-抗风防坠)
(Interspersed-wind resistance and fall prevention)

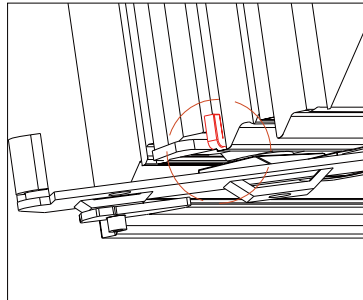


(定位)
(Positioning)

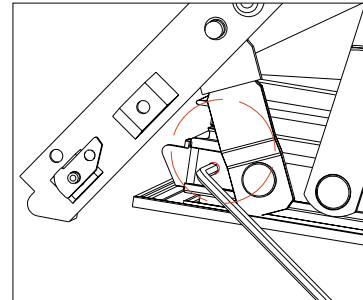


(避角码)
(Avoid corner joint position)

二、框安装 frame part fix


1. 将滑撑放置于框槽口位置并使包角处定位面顶住框型材槽口面。
Place friction stay at the frame notch position and make the positioning surface at the corner of the wrapper against the notch surface of the frame profile.
2. 通过转动滑撑两端的固定垫片, 夹持于C槽或K槽后并用螺钉把固定垫片与滑撑底槽固定, 实现预安装, 然后其它孔位通过螺钉将滑撑与型材固定。
By rotating the fixed washers at both ends of the friction stay, clamp them in the C groove or K groove and fix the fixed washer with the friction stay bottom groove with screws to achieve the pre-install, and then fix the friction stay with the profile through screws in other holes.

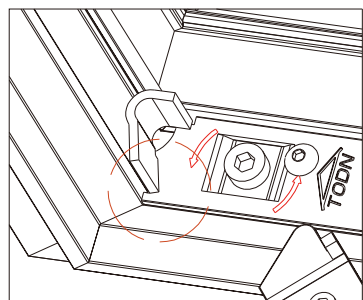

(定位)
(Positioning)

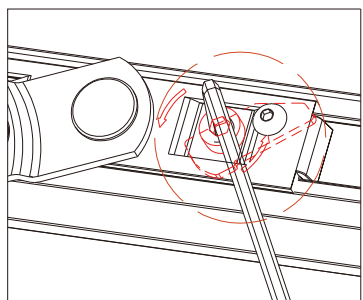


预安装并连接
Pre-installed and connected

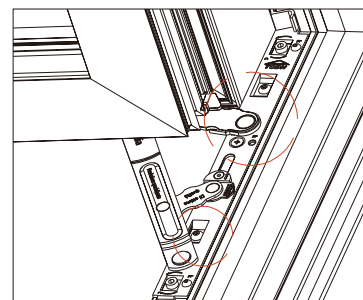

螺钉固定
Screw fixation

三、安装完成 finish installation

1. 安装完成后, 在外界风力较大的情况下, 可通过调节启闭力有效提高抗风防坠的能力。
After the installation is completed, in case of strong external wind, the ability to resist wind and fall can be effectively improved by adjusting the opening and closing force.

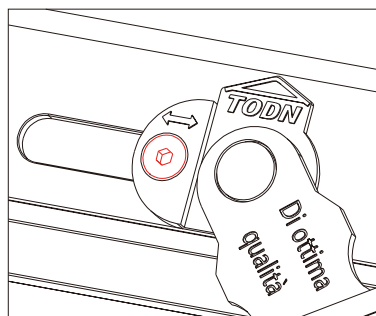


(调节启闭力)
(Adjust opening and closing force)

纱窗隐藏合页安装说明


Installation instruction of concealed screen hinge

一、框安装 frame part fix

1. 将隐藏合页放置于框槽口位置, 同时使滑轨顶端卡于槽口;
Place the concealed hinge in the notch of the frame, and at the same time make the top of the slide rail stuck in the notch;
2. 通过转动两端的夹紧块, 夹持于C或K槽, 实现预安装, 然后其他孔位通过螺钉固定。
By rotating the clamping blocks at both ends, they are clamped in the C or K grooves to achieve pre-installation, and then other holes are fixed by screws.

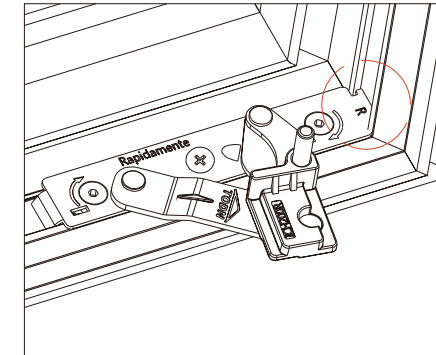


(定位)
(Positioning)

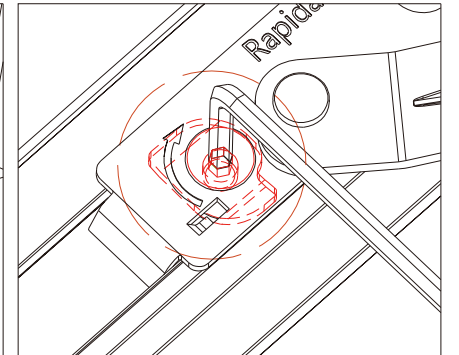

(连接固定)
(Fixed connection)


二、扇安装 sash part fix

1. 连接滑块沿扇型材C槽口滑入
Slide the block in C groove from sash side view

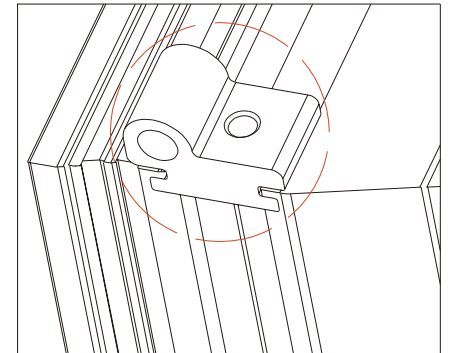


三、框扇组装 Frame and sash assembly

1. 将安装有连接滑块的扇型材放置于隐藏合页的支撑座上;
Place the sash profile with sliding block on the support base of the concealed hinge;
2. 滑动连接滑块使孔与销轴对应, 通过内六角扳手使紧定螺钉顶紧型材, 完成安装。(说明: 拆卸时, 仅需要拧松紧定螺钉, 使连接滑块滑出销轴, 便可取下窗扇。)
Move the sliding block so that the hole corresponds to the pin shaft, and use the Allen key to tighten the set screw on the profile to complete the installation. (Description: during the dis-assembly, only need to loosen the set screw and move the sliding block out of the pin shaft, and then the window sash can be removed.)

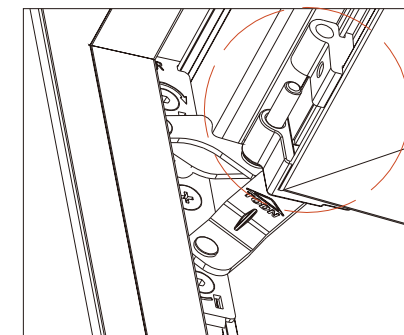



(插入)
(insert)

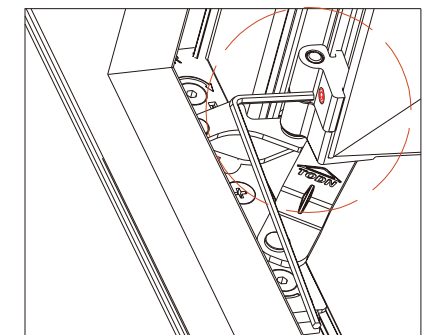

(锁紧)
(tight)

IW200 外平开窗纱一体系列

IW200 Open-out Side Hung Window With Screen Window Series

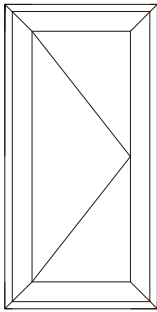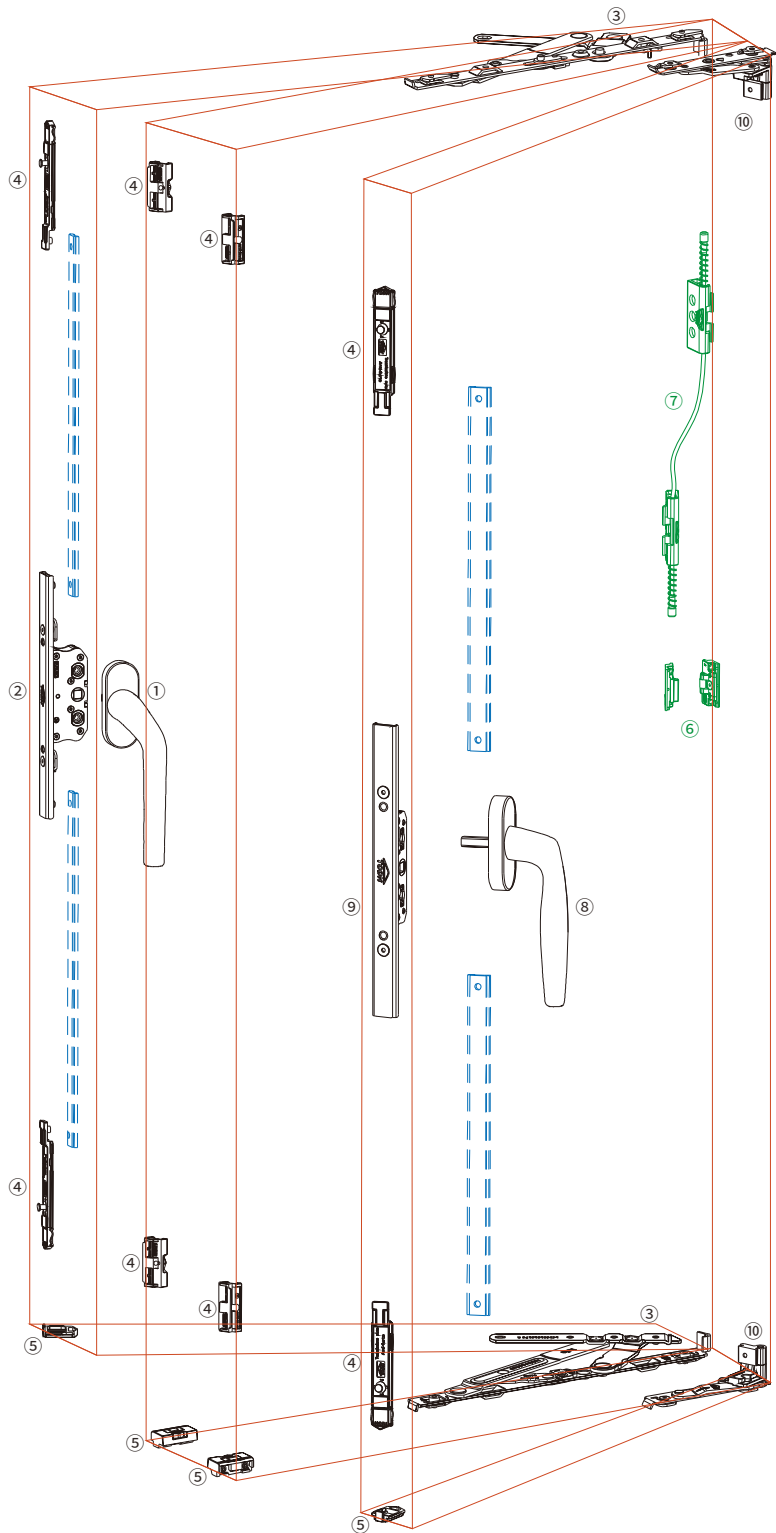

IW200 外平开窗纱一体系列

IW200 Open-out Side Hung Window With Screen Window Series

玻璃窗/Glass window				
序号/No.	名称/Name	型号/Code	数量/QTY	备注/Mark
1	执手 Handle	IHS00340R	1	分左右, 方钢外露40mm Left&Right, Exposed spindle length 40mm
2	不锈钢传动器 SS Transmitter	ISG02	1	中心距24mm Center distance 24mm
3	滑撑 Friction stay	IFS200\LR	1	
4	单锁点四件套 Single lock four-piece set	ISLF05	1	
5	支撑组件 Support components	ISCT02	1	
6	中间锁块 Mid locking plate	IMLP01	1	选配 Optional
7	防坠器 Fall arrester	ISDP01R	1	分左右, 选配 Left&Right, Optional



纱窗/Screen window				
序号/No.	名称/Name	型号/Code	数量/QTY	备注/Mark
8	执手 Handle	IH00225	1	方钢外露25mm Exposed spindle length 25mm
9	不锈钢传动器 SS Transmitter	ISG01	1	中心距11mm Center distance11mm
4	单锁点四件套 Single lock four-piece set	ISLF05	1	
5	支撑组件 Support components	ISCT02	1	
10	纱窗隐藏式合页 Concealed hinge for screen window	ICH200\LR	1	

配置说明:
Configuration instructions

- 本配置适用窗扇高度为1500mm,窗扇宽度650mm以内的窗型。
This configuration is suitable for window sash height of 1500mm and window sash width within 650mm.
- 滑撑最大承重60kg,建议窗型比(高/宽)保持在1.5:1。
The maximum load-bearing capacity of sliding brace is 60kg, and it is recommended that the window ratio (height/width) be maintained at 1.5:1
- 纱窗合页最大承重15kg。
The maximum load-bearing capacity of the screen hinge is 15kg
- 本配置适用C槽型材。
This configuration is suitable for C-groove profiles.

IW300 外平开窗纱一体系列

IW300 Open-out Side Hung Window With Screen Window Series

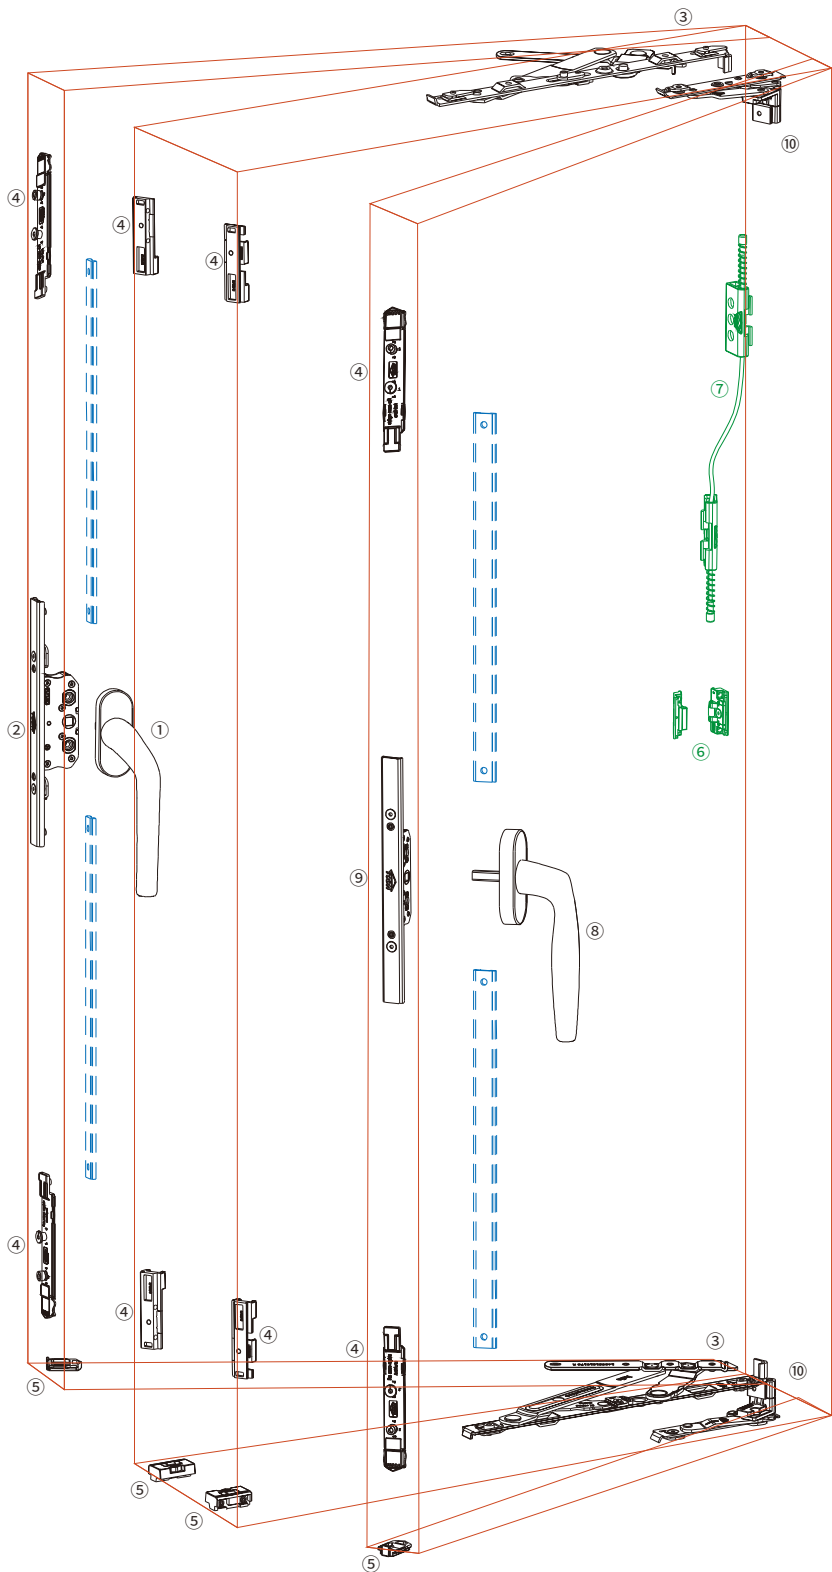

IW300 外平开窗纱一体系列

IW300 Open-out Side Hung Window With Screen Window Series

玻璃窗/Glass window				
序号/No.	名称/Name	型号/Code	数量/QTY	备注/Mark
1	执手 Handle	IHS00340R	1	分左右, 方钢外露40mm Left&Right, Exposed spindle length 40mm
2	不锈钢传动器 SS Transmitter	ISG02	1	中心距24mm Center distance 24mm
3	滑撑 Friction stay	IFS200\LR	1	
4	锁闭四件套 Single lock four-piece set	ISLF02	1	
5	支撑组件 Support components	ISCT02	1	
6	中间锁块 Mid locking plate	IMLP01	1	选配 Optional
7	防坠器 Fall arrester	ISDP01R	1	分左右, 选配 Left&Right, Optional



纱窗/Screen window				
序号/No.	名称/Name	型号/Code	数量/QTY	备注/Mark
8	执手 Handle	IH00225	1	方钢外露25mm Exposed spindle length 25mm
9	不锈钢传动器 SS Transmitter	ISG01	1	中心距11mm Center distance11mm
4	锁闭四件套 Single lock four-piece set	ISLF02	1	
5	支撑组件 Support components	ISCT02	1	
10	纱窗隐藏式合页 Concealed hinge for screen window	ICH200\LR	1	

配置说明:
Configuration instructions

- 本配置适用窗扇高度为1500mm,窗扇宽度650mm以内的窗型。
This configuration is suitable for window sash height of 1500mm and window sash width within 650mm.
- 滑撑最大承重60kg,建议窗型比(高/宽)保持在1.5:1。
The maximum load-bearing capacity of sliding brace is 60kg, and it is recommended that the window ratio (height/width) be maintained at 1.5:1
- 纱窗合页最大承重15kg。
The maximum load-bearing capacity of the screen hinge is 15kg
- 本配置适用C槽型材。
This configuration is suitable for C-groove profiles.

IW400 外平开窗纱一体系列

IW400 Open-out Side Hung Window With Screen Window Series

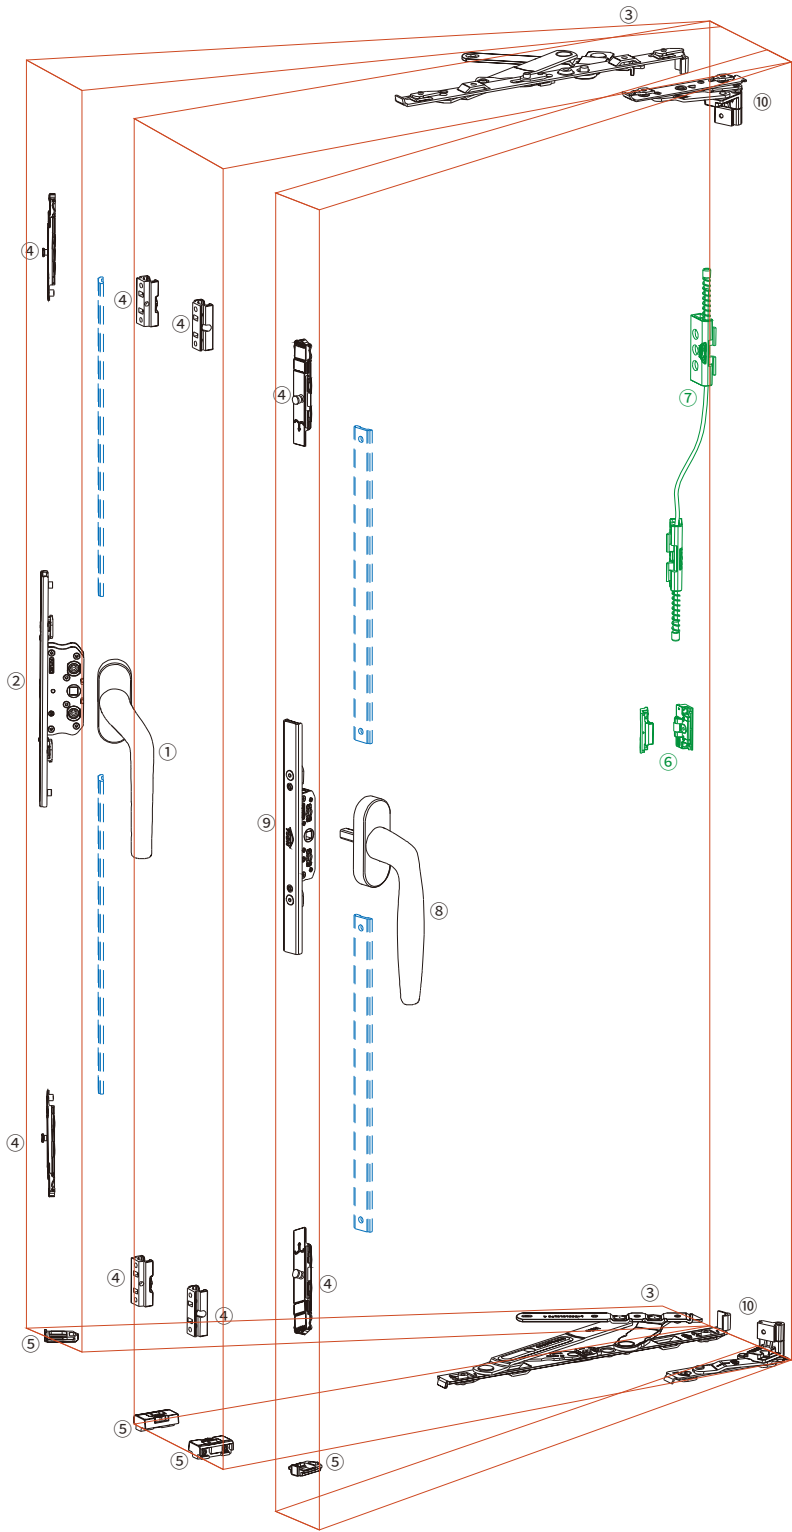

IW400 外平开窗纱一体系列

IW400Open-out Side Hung Window With Screen Window Series

玻璃窗/Glass window				
序号/No.	名称/Name	型号/Code	数量/QTY	备注/Mark
1	执手 Handle	IHS00340R	1	分左右, 方钢外露40mm Left&Right, Exposed spindle length 40mm
2	不锈钢传动器 SS Transmitter	ISG02	1	中心距24mm Center distance 24mm
3	滑撑 Friction stay	IFS200\LR	1	
4	不锈钢四件套 Single lock four-piece set	ISLF04	1	
5	支撑组件 Support components	ISCT02	1	
6	中间锁块 Mid locking plate	IMLP01	1	选配 Optional
7	防坠器 Fall arrester	ISDP01R	1	分左右, 选配 Left&Right, Optional



纱窗/Screen window				
序号/No.	名称/Name	型号/Code	数量/QTY	备注/Mark
8	执手 Handle	IH00225	1	方钢外露25mm Exposed spindle length 25mm
9	不锈钢传动器 SS Transmitter	ISG01	1	中心距11mm Center distance11mm
4	不锈钢四件套 Single lock four-piece set	ISLF04	1	
5	支撑组件 Support components	ISCT02	1	
10	纱窗隐藏式合页 Concealed hinge for screen window	ICH200\LR	1	

配置说明：
Configuration instructions

- 本配置适用窗扇高度为1500mm,窗扇宽度650mm以内的窗型。
This configuration is suitable for window sash height of 1500mm and window sash width within 650mm.
- 滑撑最大承重60kg,建议窗型比(高/宽)保持在1.5: 1。
The maximum load-bearing capacity of sliding brace is 60kg, and it is recommended that the window ratio (height/width) be maintained at 1.5:1
- 纱窗合页最大承重15kg。
The maximum load-bearing capacity of the screen hinge is 15kg
- 本配置适用C槽型材。
This configuration is suitable for C-groove profiles.

IN100 内平开窗纱一体系列

IN100Open-in Side Hung Window With Screen Window Series

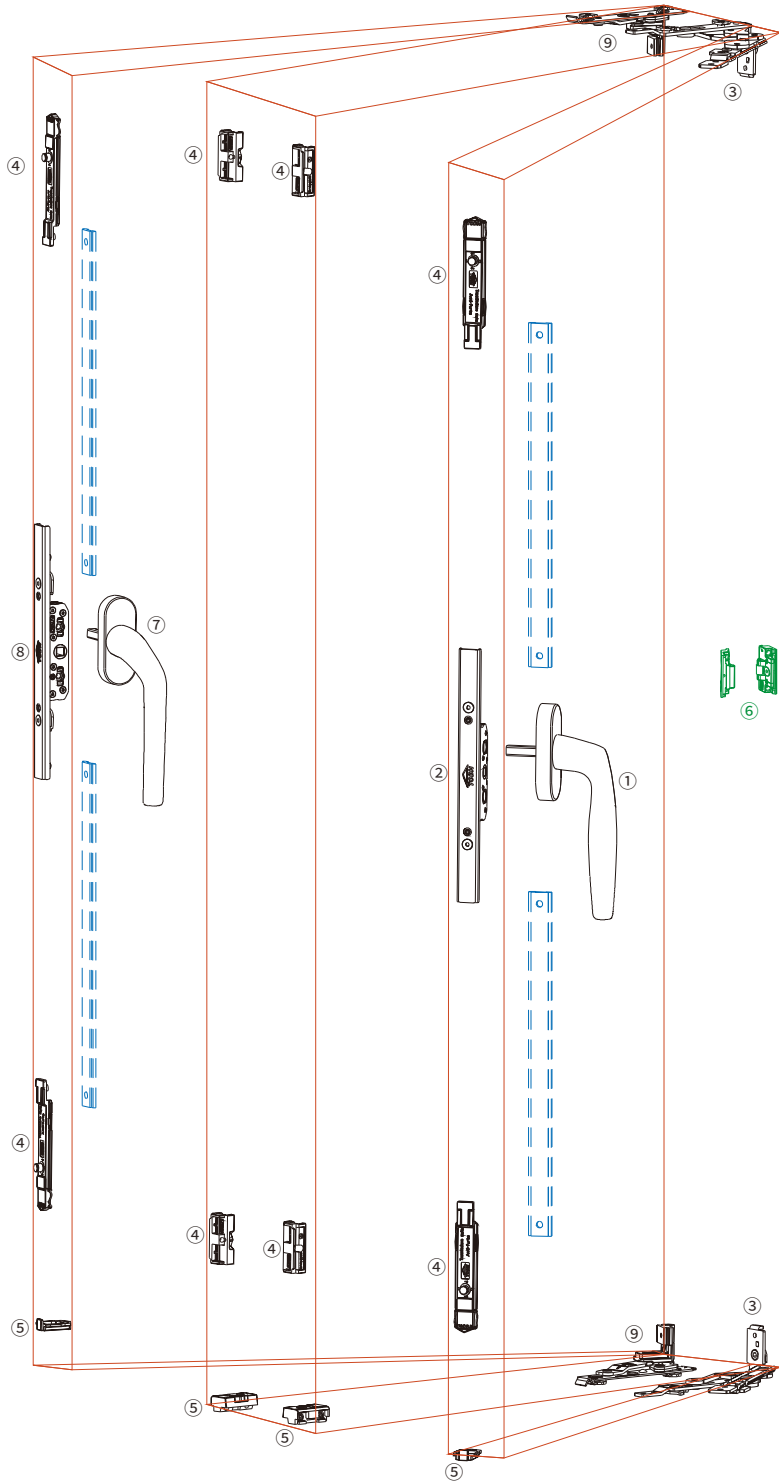

IN100 内平开窗纱一体系列

IN100Open-in Side Hung Window With Screen Window Series



玻璃窗/Glass window				
序号/No.	名称/Name	型号/Code	数量/QTY	备注/Mark
1	执手 Handle	IH00225	1	方钢外露25mm Exposed spindle length 25mm
2	不锈钢传动器 SS Transmitter	ISG01	1	中心距11mm Center distance 11mm
3	隐藏式合页 Concealed hinge	ICH100\LR	1	
4	单锁点四件套 Single lock four-piece set	ISLF05	1	
5	支撑组件 Support components	ISCT02	1	
6	中间锁块 Mid locking plate	IMLP01	1	选配 Optional

纱窗/Screen window				
序号/No.	名称/Name	型号/Code	数量/QTY	备注/Mark
7	执手 Handle	IHS00325R	1	分左右, 方钢外露25mm Exposed spindle length 25mm
8	不锈钢传动器 SS Transmitter	ISG02	1	中心距24mm Center distance24mm
4	单锁点四件套 Single lock four-piece set	ISLF05	1	
5	支撑组件 Support components	ISCT02	1	
9	纱窗隐藏式合页 Concealed hinge for screen window	ICH200\LR	1	

配置说明:
Configuration instructions

- 本配置适用窗扇高度为1900mm,窗扇宽度800mm以内的窗型。
This configuration is suitable for window sash height of 1900mm and window sash width within 800mm.
- 隐藏合页最大承重50kg,建议窗型比(高/宽)保持在1.5:1。
The maximum load-bearing capacity of sliding brace is 50kg, and it is recommended that the window ratio (height/width) be maintained at 1.5:1.
- 纱窗合页最大承重15kg。
The maximum load-bearing capacity of the screen hinge is 15kg
- 本配置适用C槽型材。
This configuration is suitable for C-groove profiles.

IM100 平开门系列
IM100 Side Hung Door Series

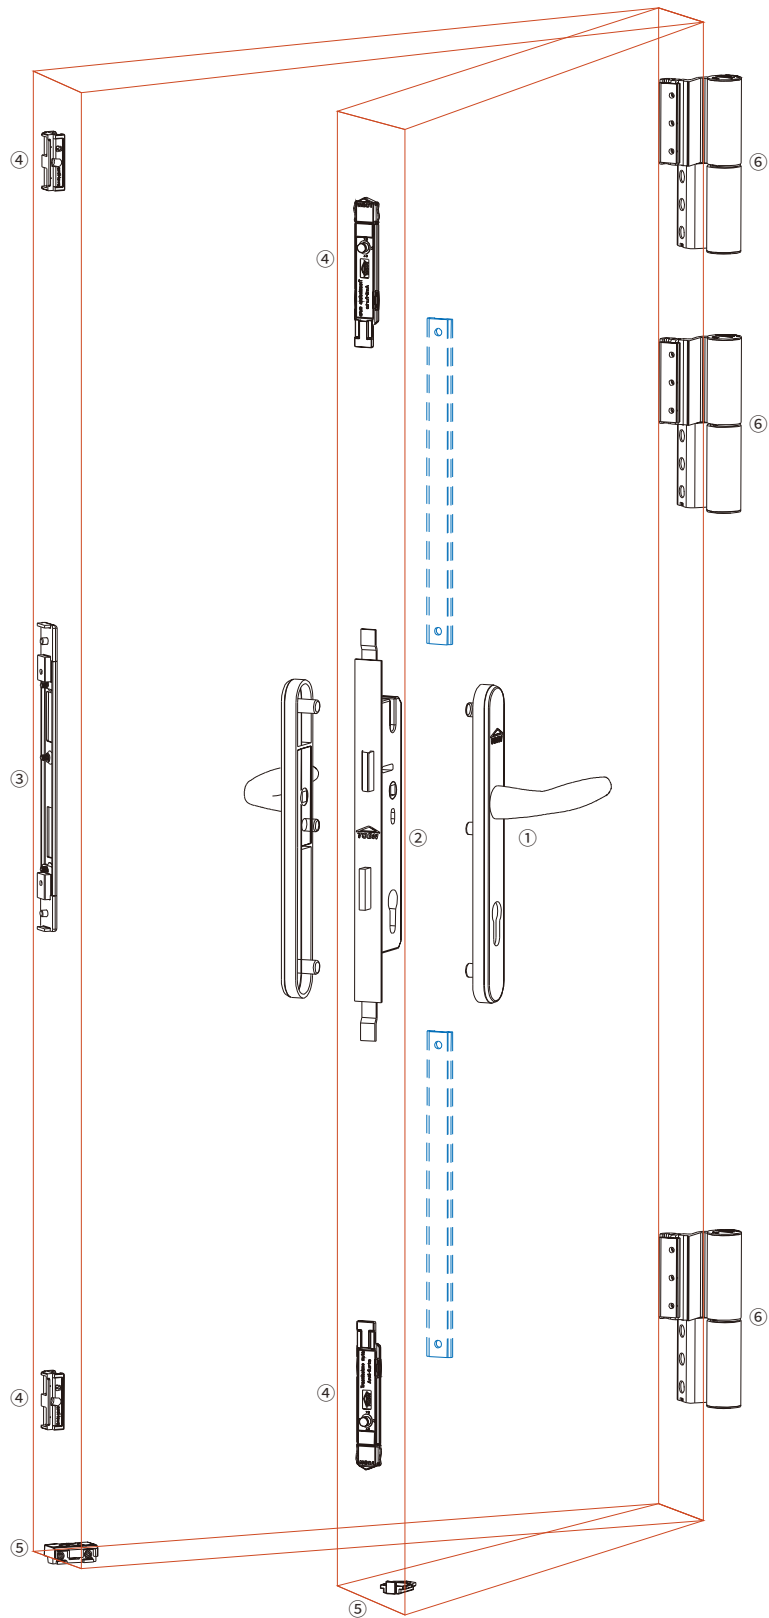

IM100 平开门配置
IM100 Side Hung Door configuration

序号/No.	名称/Name	型号/Code	数量/QTY	备注/Mark
1	门执手 Door handle	IDHD01	1	
2	门锁 Door lock	IDL02030	1	中心距30mm Center distance30mm
3	锁面板 Locking plate	IFP02	1	
4	单锁点四件套 Single lock four-piece set	ISLF05	1	
5	支撑组件 Support components	ISCT02	1	
6	门合页 Door hinge	IDHG01	3	

配置说明：
Configuration instructions

- 1、门合页最大承重130kg。
The maximum load-bearing capacity for door hinge is 130kg
- 2、本配置适用C槽型材。
This configuration is suitable for C-groove profiles.

控制产品系列

Controller Product Series

产品名称: 无基座执手

Product name: Handle without base

产品型号: IH00525 (方钢外露25mm)

Product code: IH00525 (exposed spindle length 25mm)

主要材质: 铝合金

Main material: aluminum alloy

表面处理: 纳米涂层


Surface treatment: Nano coating

产品型号: IHT00525 (固定方式: 拉铆连接)

Product code: IHT00525 (Fixing method: riveting connection)

方钢长度: L(25-45), L可定制

spindle length: L(25-45), L can be customized,

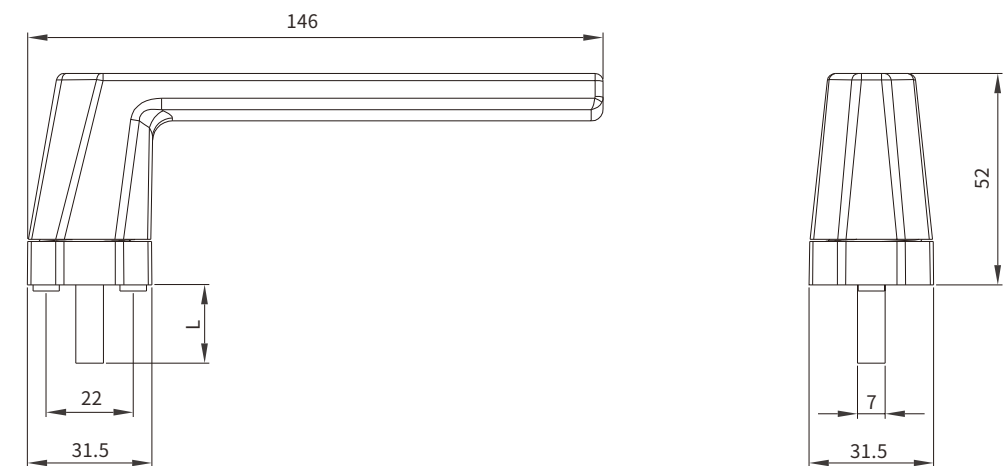

可选颜色/optional color



砚石黑
Inkstone black



玛瑙棕
Agate Brown




太空灰
Space gray




控制产品系列

Controller Product Series

产品名称: 无底座执手 Product name: Handle without base 产品型号: IHS00545R (方钢外露45mm) Product code: IHS00545R (exposed spindle length 45mm)	主要材质: 铝合金 Main material: aluminum alloy 表面处理: 纳米涂层 Surface treatment: Nano coating
产品型号: IHST00545R (固定方式: 拉铆连接) Product code: IHST00545R (Fixing method: riveting connection)	方钢长度: L(25-45), L可定制。 spindle length: L(25-45), L can be customized,

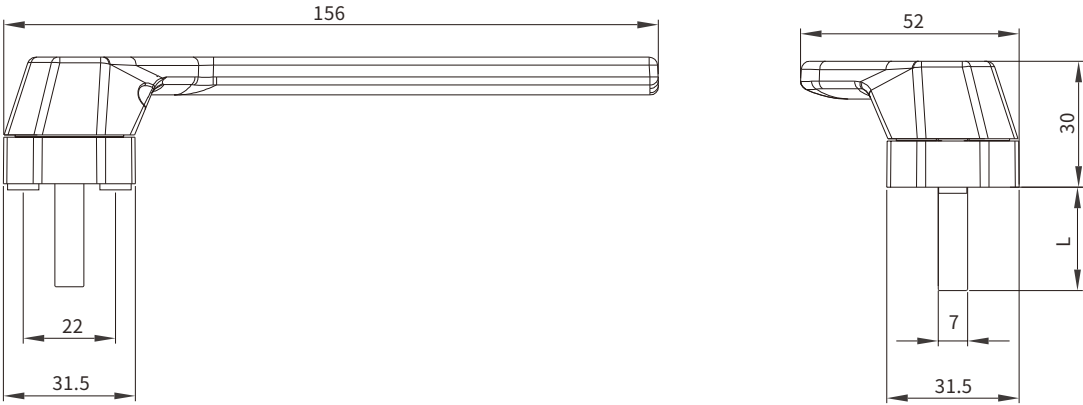


可选颜色/optional color

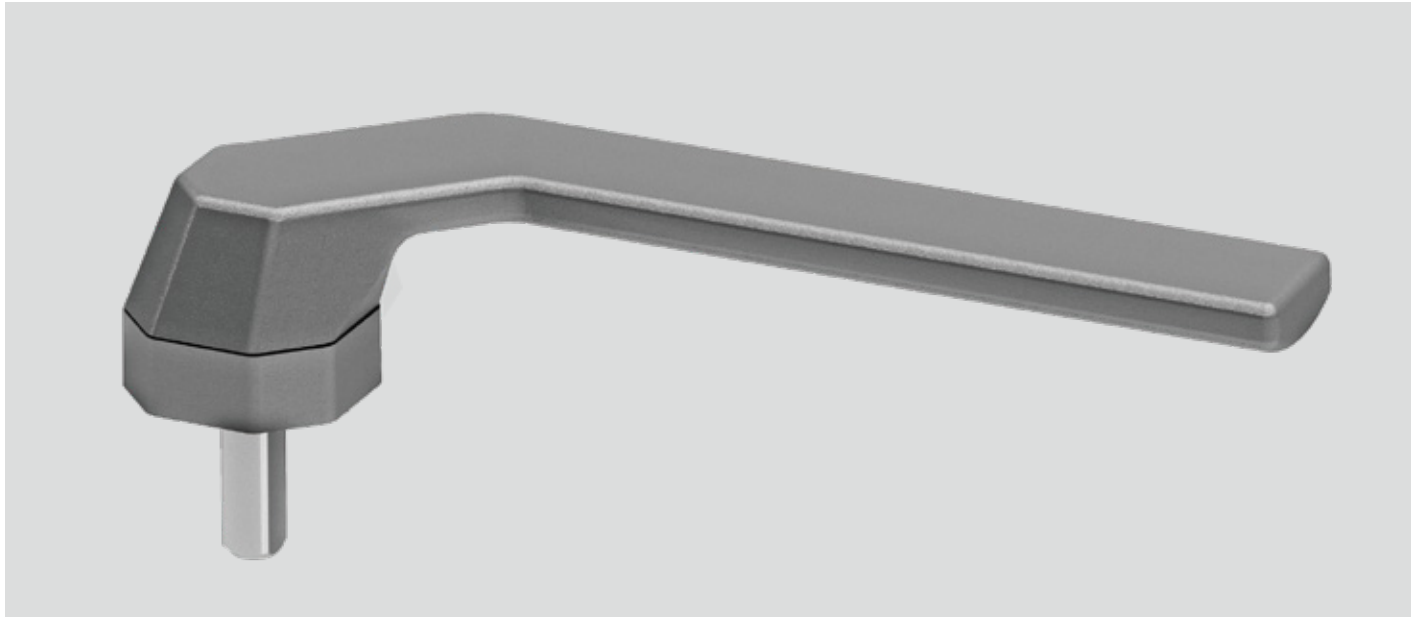


控制产品系列

Controller Product Series

产品名称: 执手 Product name: Handle 产品型号: IH00225(方钢外露25mm) Product code: IH00225(exposed spindle length 25mm) 主要材质: 铝合金 Main material: aluminum alloy	表面处理: 电解氧化 Surface treatment: electrolytic oxidation 方钢长度: L(25-45) , L可定制 spindle length: L(25-45), L can be customized,
---	--

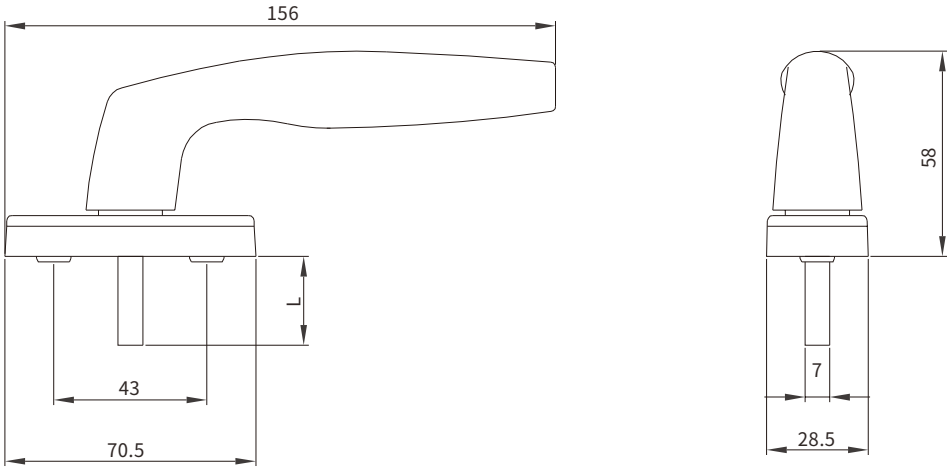

可选颜色/optional color



控制产品系列

Controller Product Series

产品名称: 执手

Product name: Handle

产品型号: IHS00345R(方钢外露45mm)

Product code: IHS00345R(exposed spindle length 45mm)

主要材质: 铝合金


Main material: aluminum alloy

表面处理: 电解氧化

Surface treatment: electrolytic oxidation

方钢长度: L(25-45), L可定制,

spindle length: L(25-45), L can be customized,

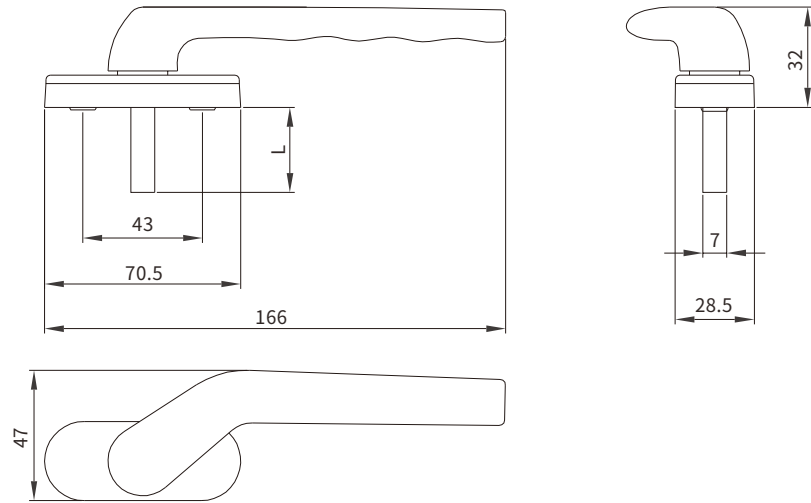

可选颜色/optional color



银灰
Silver grey



青古铜
Green bronze



控制产品系列

Controller Product Series

产品名称: 执手

Product name: Handle

产品型号: IH00125(方钢外露25mm)

Product code: IH00125(exposed spindle length 25mm)

主要材质: 铝合金


Main material: aluminum alloy

表面处理: 电解氧化

Surface treatment: electrolytic oxidation

方钢长度: L(25-45), L可定制,

spindle length: L(25-45), L can be customized,

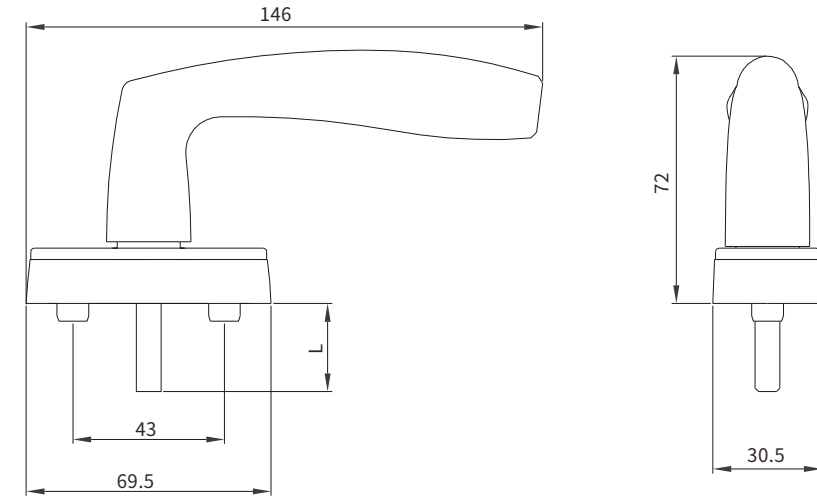

可选颜色/optional color



雅典银
Athens Silver



控制产品系列

Controller Product Series

产品名称: 门执手

Product name: Door handle

产品型号: IDHD01

Product code: IDHD01

主要材质: 铝合金

Main material: aluminum alloy

表面处理: 电解氧化


Surface treatment: electrolytic oxidation

方钢长度: 扇型材厚度 + (35-39mm)

Spindle length = sash thickness + (35-39mm)

螺钉长度: 扇型材厚度 + (11-15mm)

Screw length (M5) L = sash thickness + (11-15mm)

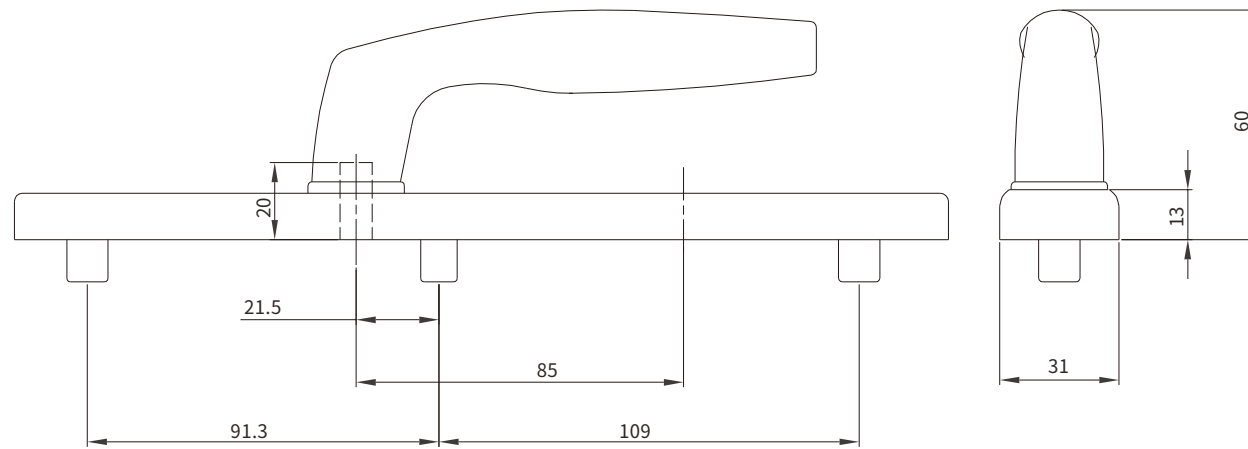

可选颜色/optional color



银灰
Silver grey



青古铜
Green bronze



承重产品系列

Loading product series

产品名称:滑撑

Product name: Friction stay

产品型号:IFS100\LR

Product code:IFS100\LR

主要材质:SUS304

Main material:SUS304

最大承重:60KG

Max loading:60KG

开启角度:89°

Opening angle:89°

适用型材:K槽、C槽


Suitable profile: K groove, C groove

适用范围:外平开窗

Scope of application: open-out side hung window

安装特点:免铣槽、自定位、夹持式预安装+螺钉紧固

Installation features: no need mill profile, self-positioning, clamping type pre-installation + screw fastening

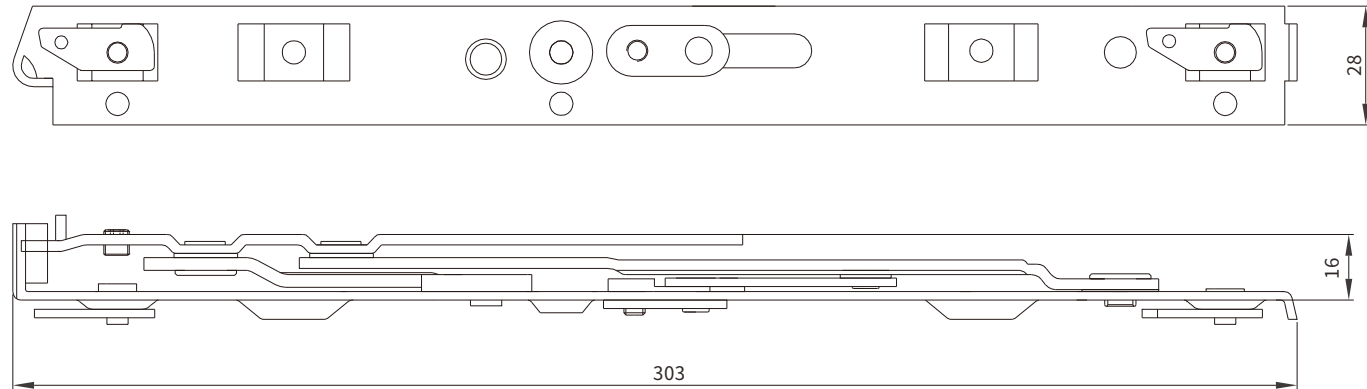

承重产品系列

Loading product series

产品名称:滑撑

Product name: Friction stay

产品型号:IFS200\LR

Product code:IFS200\LR

主要材质:SUS304

Main material:SUS304

最大承重:60KG

Max loading:60KG

开启角度:89°

Opening angle:89°

适用型材:C槽


Suitable profile: C groove

适用范围:外平开窗

Scope of application: open-out side hung window

安装特点:免铣槽、自定位、夹持式预安装+螺钉紧固

Installation features: no need mill profile, self-positioning, clamping type pre-installation+screw fastening

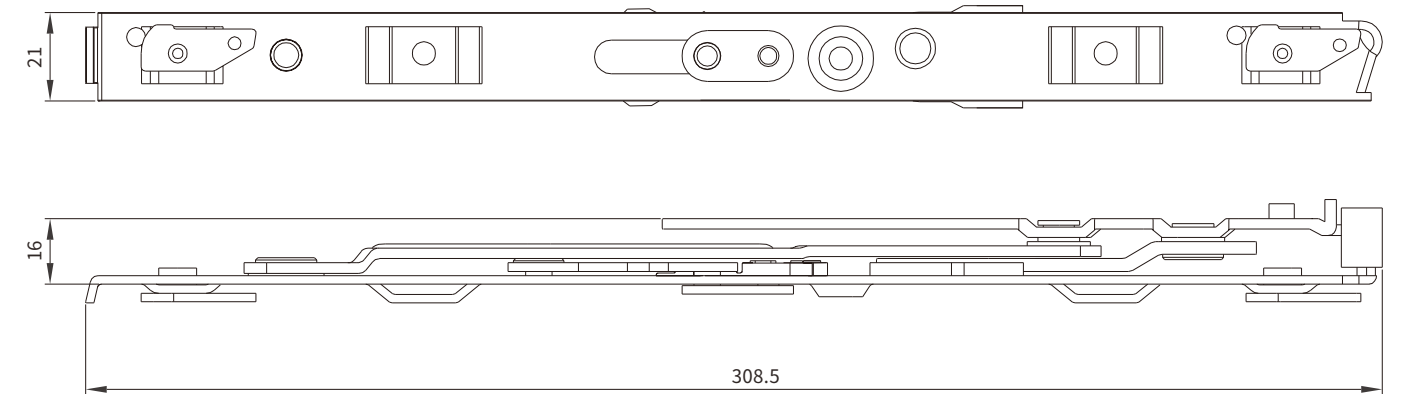

承重产品系列

Loading product series

产品名称: 纱窗隐藏合页

Product name: Concealed screen hinge

产品型号: ICH200\LR

Product code: ICH200\LR

主要材质: SUS304

Main material: SUS304

最大承重: 15KG

Max loading: 15KG

开启角度: 90°

Opening angle: 90°

适用型材: C槽


Suitable profile: C groove

适用范围: 平开纱窗

Scope of application: side hung screen window

安装特点: 自定位、夹持式预安装+螺钉紧固

Installation features: self-positioning,
clamping type pre-installation + screw fastening

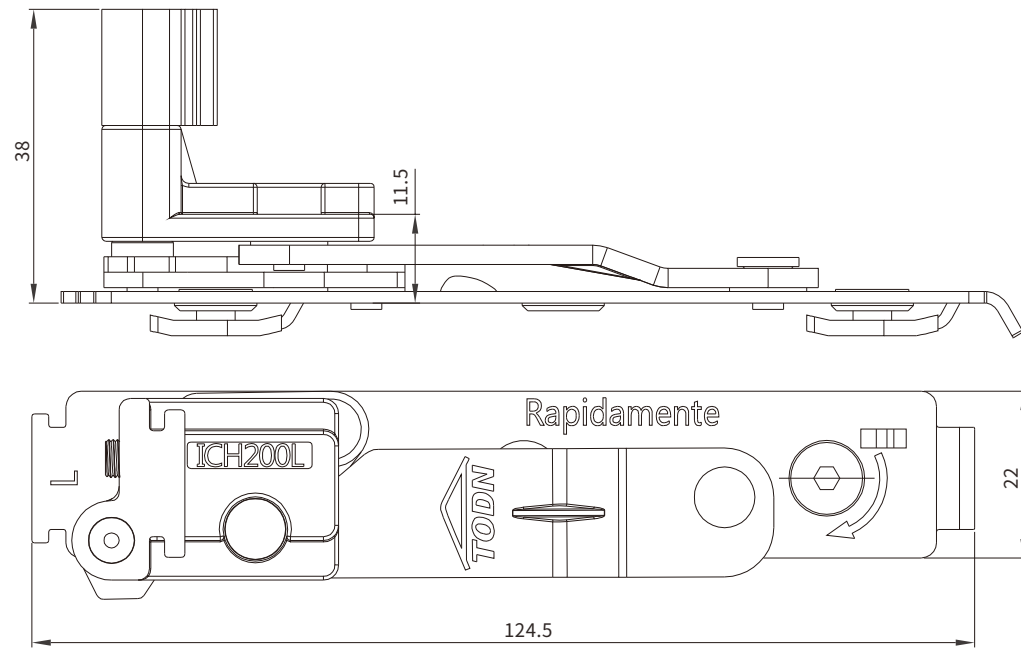

承重产品系列

Loading product series

产品名称: 纱窗隐藏合页

Product name: Concealed screen hinge

产品型号: ICH200K\LR

Product code: ICH200K\LR

主要材质: SUS304

Main material: SUS304

最大承重: 15KG

Max loading: 15KG

开启角度: 90°

Opening angle: 90°

适用型材: K槽



Suitable profile: K groove

适用范围: 平开纱窗

Scope of application: side hung screen window

安装特点: 自定位、夹持式预安装+螺钉紧固


Installation features: self-positioning,
clamping type pre-installation + screw fastening

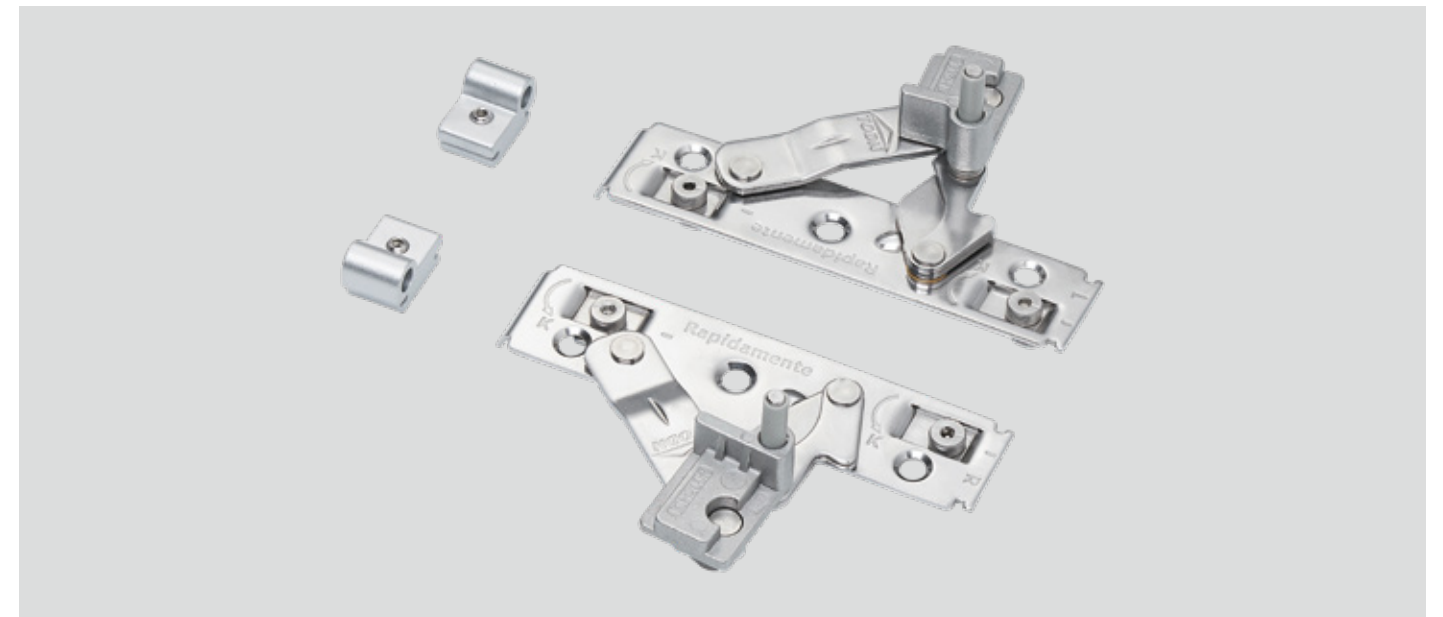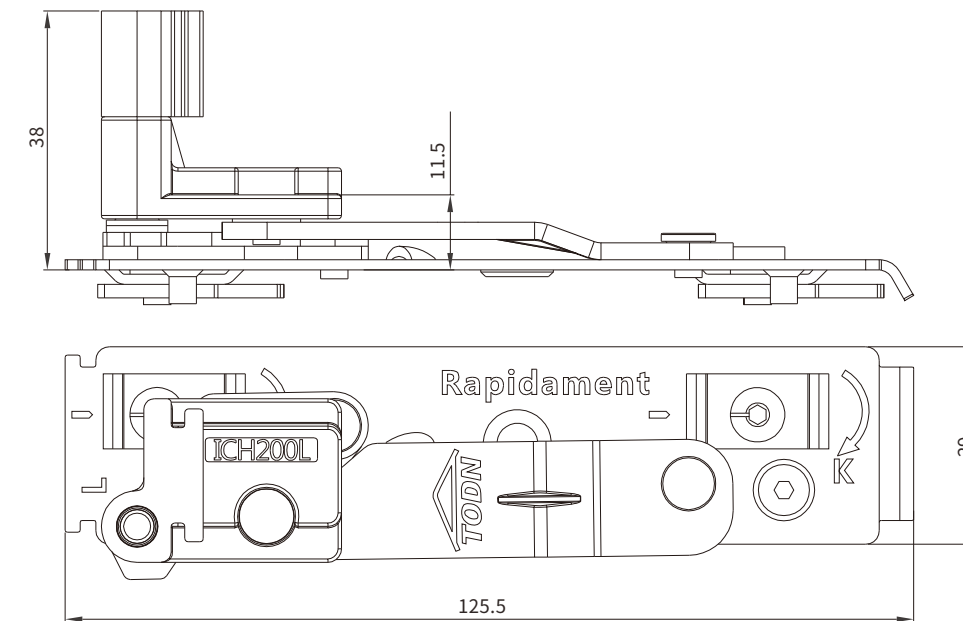

承重产品系列

Loading product series



产品名称:隐藏合页	开启角度:90°
Product name: Concealed hinge	Opening angle:90°
产品型号:ICH100\LR	适用型材:C槽
Product code:ICH100\LR	Suitable profile:C groove
主要材质:SUS304	适用范围:内平开窗
Main material:SUS304	Scope of application: Open-in side hung window
最大承重:50KG	安装特点:自定位、夹持式预安装+螺钉紧固
Max loading: 50KG	Installation features: self-positioning, clamping type pre-installation + screw fastening

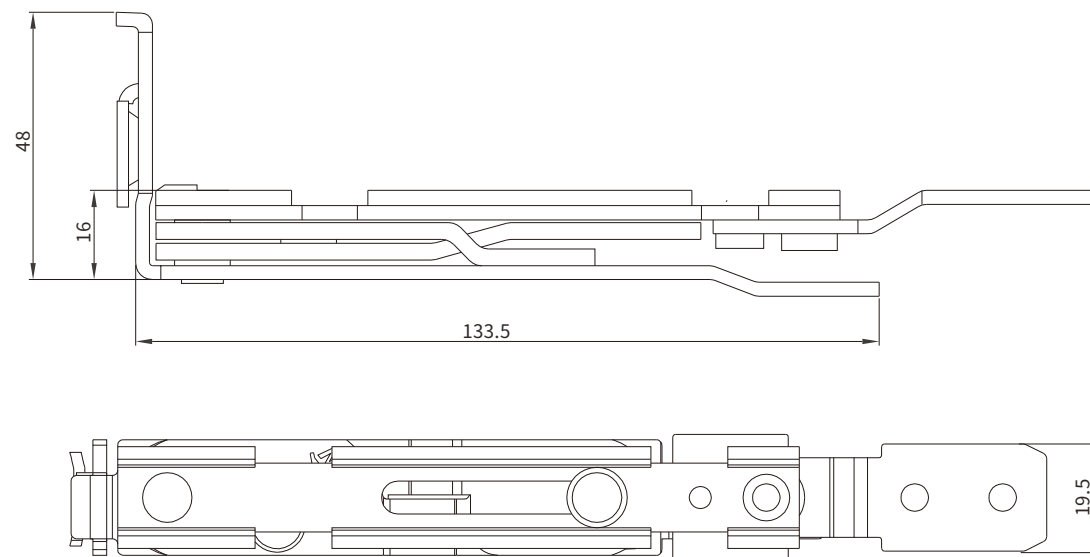

承重产品系列


Loading product series

产品名称:门合页	适用范围:平开门
Product name: Door hinge	Scope of application: side hung door
产品型号:IDHG01	表面处理:纳米涂层、氧化
Product code:IDHG01	Surface treatment: Nano coating&oxidation
最大承重:130KG	调节:三维可调
Max loading:130KG	Adjustment: three-dimensional adjustable
开启角度:180°	安装方式:夹持式安装
Opening angle:180°	Installation method: clamping installation
适用型材:C槽	
Suitable profile:C groove	

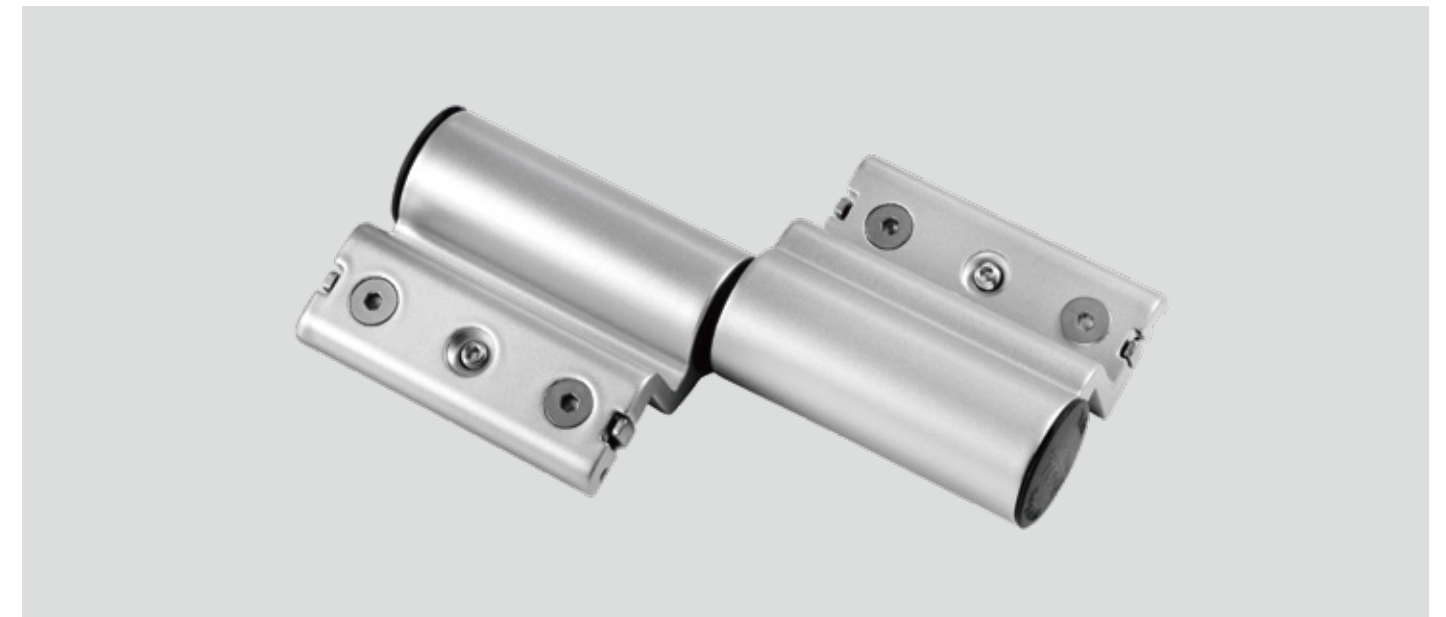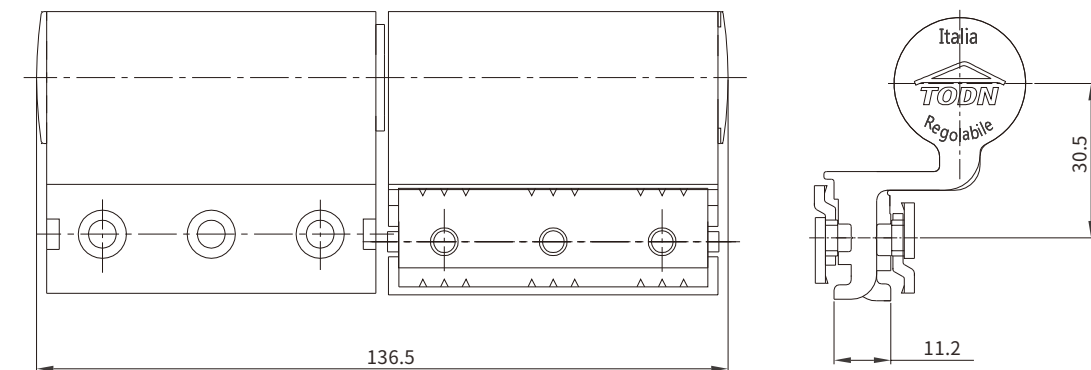


门合页简介

Door hinge introduction

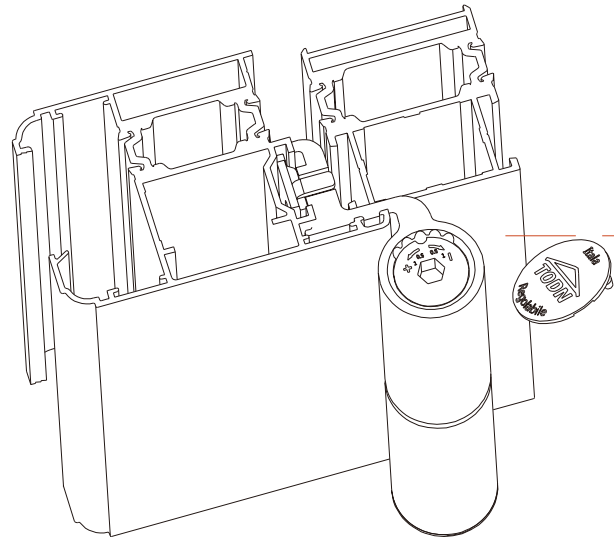


取下端盖通过内六角扳手调节, 调节量: $\pm 1\text{mm}$
Remove the end cover and adjust the adjustment amount with an Allen key: $\pm 1\text{mm}$

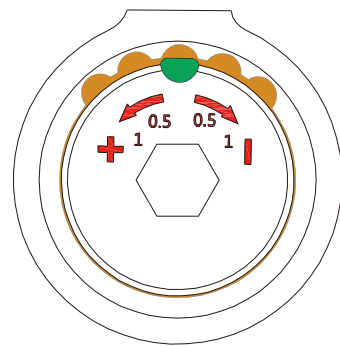

说明: 调节时注意图示绿色半圆槽需与黄色半圆槽形成圆形, 以便端盖安装固定。

Note: When adjusting, pay attention to the green semi-circular groove. The circular groove is formed into a circle to facilitate the installation and fixation of the end cover.

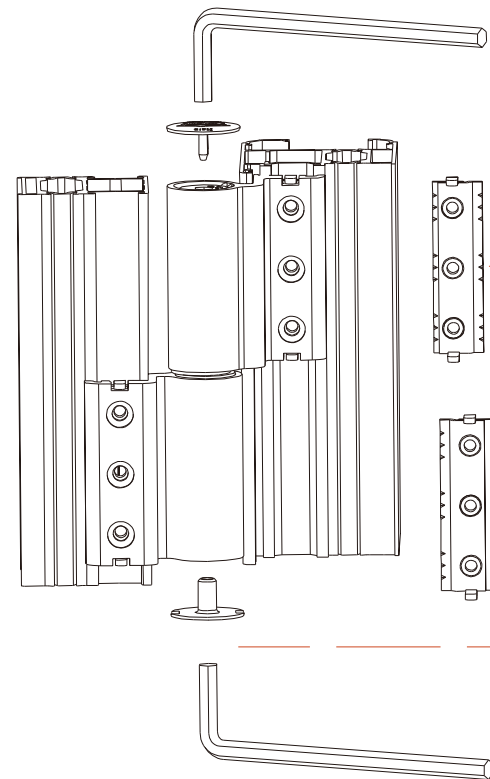

后装式夹紧块
after-mounted clamping block


取下端盖通过内六角扳手调节, 调节量: $+3\text{mm}$ 。
Remove the end cover and adjust it with an Allen key, the amount of adjustment: $+3\text{mm}$



传动产品系列

Transmission Product Series


产品名称: 传动器	传动方向: 单向, 行程18mm
Product name: transmitter	Transmission direction: unidirectional, stroke 18mm
产品型号: IDG01	表面处理: 电镀
Product code: IDG01	Surface treatment: plating
主要材质: 锌合金	安装方式: 夹持式
Main material: zinc alloy	Installation method: clamp type

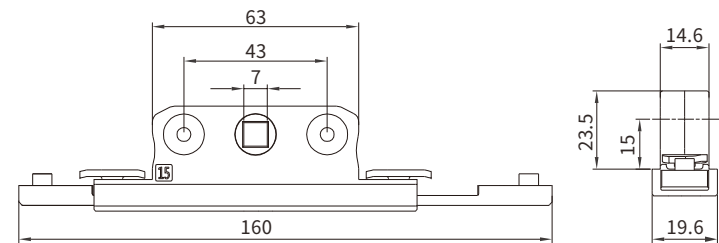

传动产品系列

Transmission Product Series


产品名称: 传动器	传动方向: 双向, 行程18mm
Product name: transmitter	Transmission direction: unidirectional, stroke 18mm
产品型号: IDG02	表面处理: 电镀
Product code: IDG02	Surface treatment: plating
主要材质: 锌合金	安装方式: 夹持式
Main material: zinc alloy	Installation method: clamp type

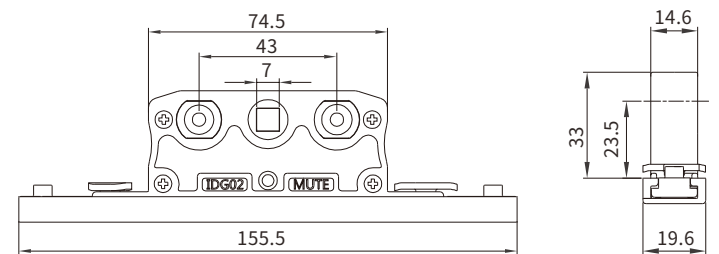

传动产品系列

Transmission Product Series


产品名称: 传动器	传动方向: 双向, 行程18mm
Product name: transmitter	Transmission direction: unidirectional, stroke 18mm
产品型号: IDG03	表面处理: 电镀
Product code: IDG03	Surface treatment: plating
主要材质: 锌合金	安装方式: 夹持式
Main material: zinc alloy	Installation method: clamp type

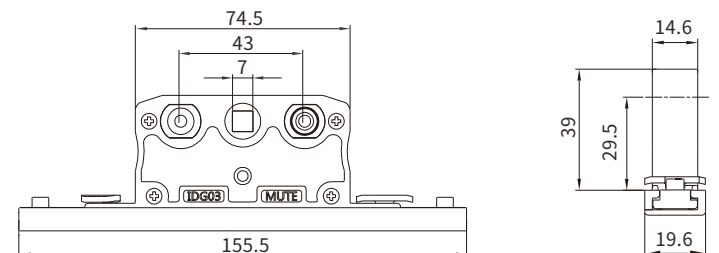

传动产品系列

Transmission Product Series


产品名称: 不锈钢传动器	传动方向: 单向, 行程18mm
Product name: SS transmitter	Transmission direction: unidirectional, stroke 18mm
产品型号: ISG01	表面处理: 拉丝
Product code: ISG01	Surface treatment: hairline
主要材质: SUS304	安装方式: 夹持式
Main material: SUS304	Installation method: clamp type

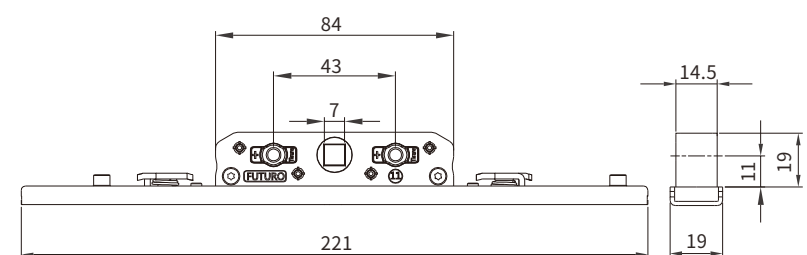

传动产品系列

Transmission Product Series


产品名称: 不锈钢传动器	传动方向: 双向, 行程18mm
Product name: SS transmitter	Transmission direction: unidirectional, stroke 18mm
产品型号: ISG02	表面处理: 拉丝
Product code: ISG02	Surface treatment: hairline
主要材质: SUS304	安装方式: 夹持式
Main material: SUS304	Installation method: clamp type

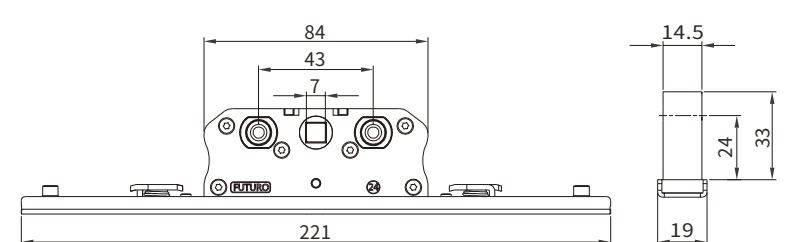

传动产品系列

Transmission Product Series


产品名称: 不锈钢传动器	传动方向: 双向, 行程18mm
Product name: SS transmitter	Transmission direction: unidirectional, stroke 18mm
产品型号: ISG03	表面处理: 拉丝
Product code: ISG03	Surface treatment: hairline
主要材质: SUS304	安装方式: 夹持式
Main material: SUS304	Installation method: clamp type

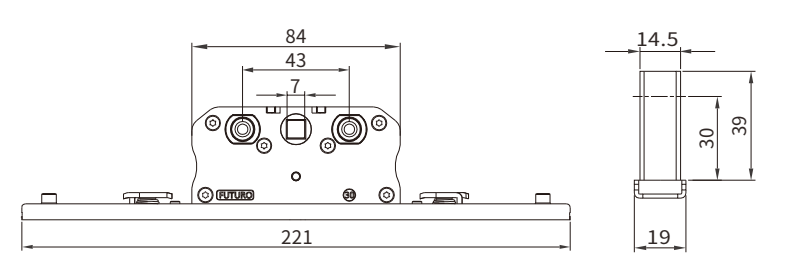

传动产品系列

Transmission Product Series



产品名称: 不锈钢传动器	传动方向: 双向, 行程18mm
Product name: SS transmitter	Transmission direction: unidirectional, stroke 18mm
产品型号: ISG04	表面处理: 拉丝
Product code: ISG04	Surface treatment: hairline
主要材质: SUS304	安装方式: 夹持式
Main material: SUS304	Installation method: clamp type

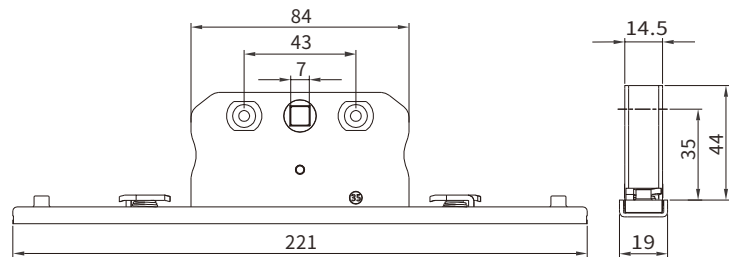

传动产品系列


Transmission Product Series

产品名称: 传动器	表面处理: 氧化
Product name: transmitter	Surface treatment: oxidation
产品型号: IAG13	安装方式: 夹持式
Product code: LAG13	Installation method: clamp type
主要材质: 锌合金、铝合金	适用范围: 内平开下悬
Main material: zinc alloy, aluminum alloy	Scope of application: Inner side hung window
传动方向: 单向, 行程36mm	
Transmission direction: unidirectional, stroke 36mm	

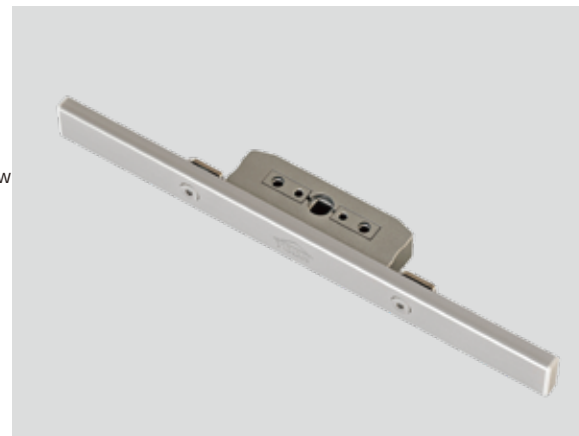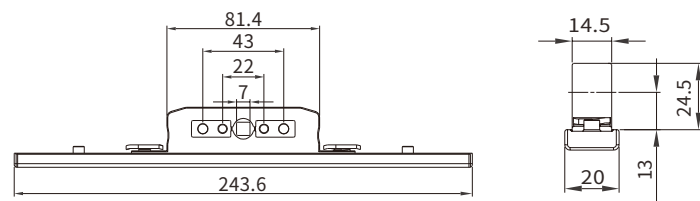

IAG13传动器选配注意事项:


IAG13 Precautions for transmitter selection:

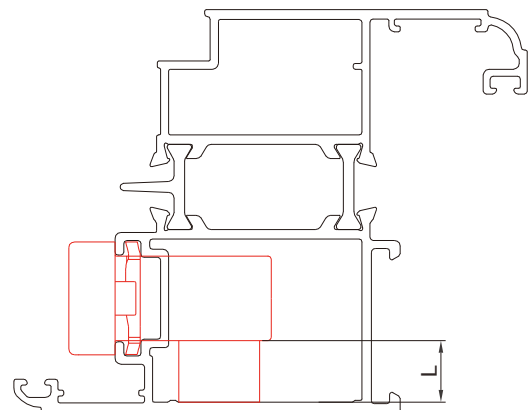


- ①根据壳体距型材壁的距离选配:
当L>10时, 选配执手IHT00525。
- ①Match according to the distance between the shell and the profile wall: When L>10, Optional: Handle, IHT00525

传动器选配注意事项:


Selection considerations of transmitter:

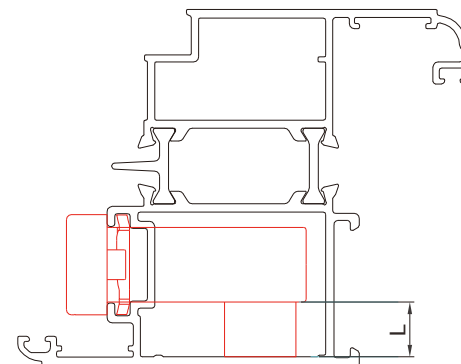


- ①根据壳体距型材壁的距离选配:
当L>9.5mm, 不可选用IDG01。
当L>12mm时, 无合适传动器匹配。
- ①Optional according to the distance between the shell and the profile wall:
When L>9.5mm, IDG01 cannot be used.
When L>12mm, there is no

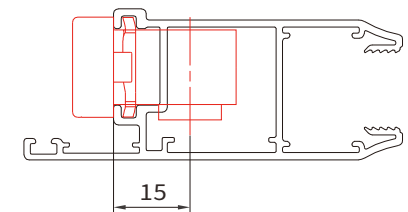

- ②根据型材结构选用不同传动器,
如上图, 当选用15mm中心距传动器时, 防斜拉组件伸出时与型材干涉, 影响安装, 此时需选用较大中心距的传动器, 避免干涉。
- ②Choose different actuators according to the profile structure,
As shown in the figure above, when the 15mm center distance transmitter is selected, the anti-slanting component will interfere with the profile when it extends, which will affect the installation. At this time, a larger center distance transmitter should be selected to avoid interference.

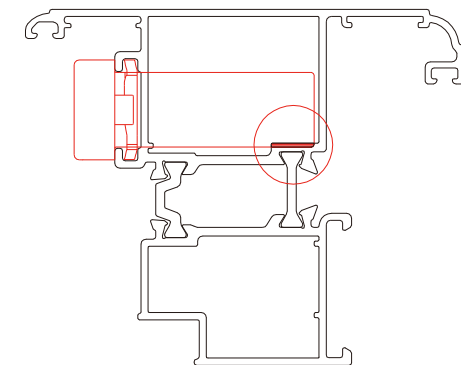

- ③当腔体内部与传动器有干涉时, 建议铣型材, 避免传动器安装后出现倾斜现象, 影响使用。
- ③When there is interference between the inside of the cavity and the transmitter, it is recommended to mill the profile to avoid tilting of the transmitter after installation, which will affect the use.

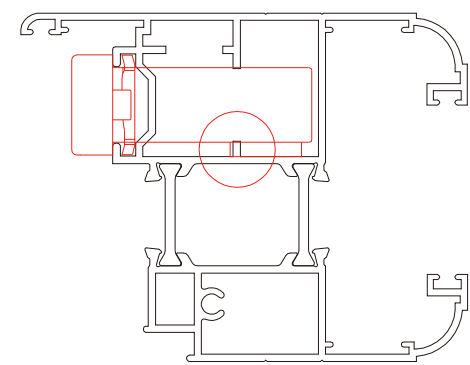

- ④当腔体内部筋位正处于防斜拉组件位置, 安装时防斜拉组件将出现轻微倾斜现象。
- ④When the internal ribs of the cavity are in the position of the anti-oblique pull component, the anti-oblique pull component will be slightly inclined during installation.

锁闭产品系列

Locking part series

产品名称: 锁闭四件套

Product name: Locking four-piece set

产品型号: ISLF02

Product code: ISLF02

主要材质: 锌合金


Main material: zinc alloy

表面处理: 电镀

Surface treatment: plating

适用型材: C槽

Suitable profile: C groove

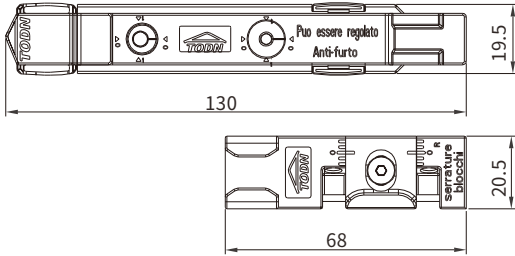

锁闭产品系列

Locking part series

产品名称: 锁闭四件套

Product name: Locking four-piece set

产品型号: IKSLF02

Product code: IKSLF02

主要材质: 锌合金



Main material: zinc alloy

表面处理: 电镀

Surface treatment: plating

适用型材: K槽

Suitable profile: K groove

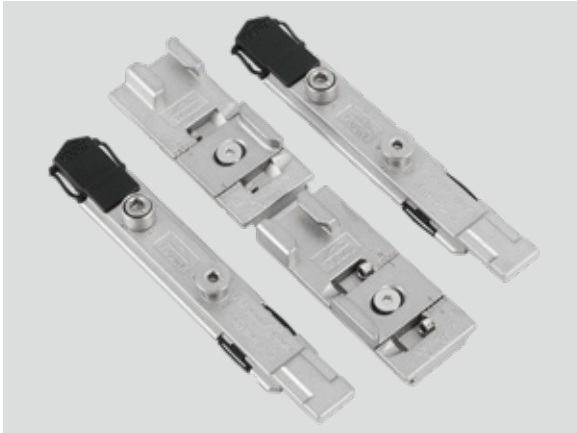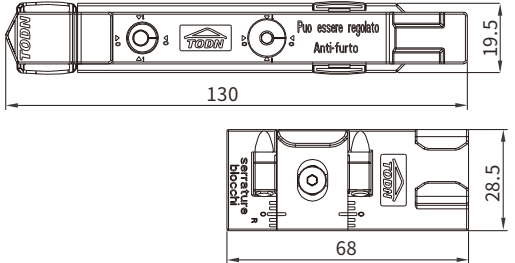

锁闭产品系列

Locking part series

产品名称: 不锈钢四件套

Product name: Stainless steel four-piece-suit

产品型号: ISLF04

Product code: ISLF04

主要材质: SUS304



Main material: SUS304

表面处理: 拉丝

Surface treatment: hairline

适用型材: C槽

Suitable profile: C groove

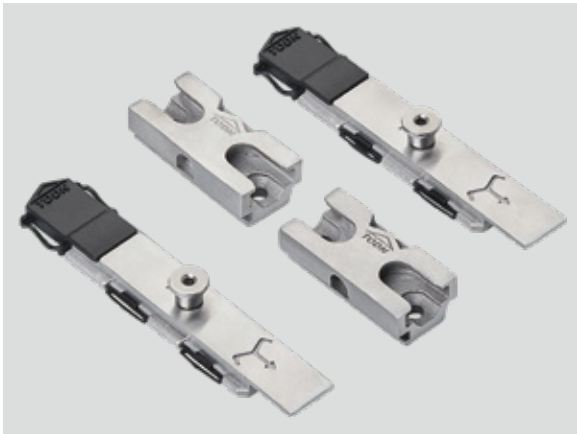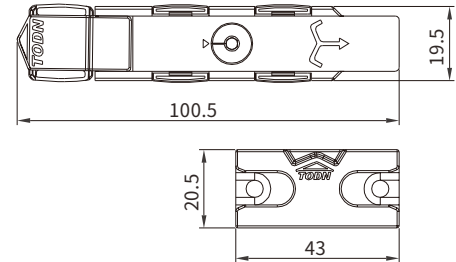

锁闭产品系列

Locking part series

产品名称: 不锈钢四件套

Product name: Stainless steel four-piece-suit

产品型号: IKSLF04

Product code: IKSLF04

主要材质: SUS304


Main material: SUS304

表面处理: 拉丝

Surface treatment: hairline

适用型材: K槽

Suitable profile: K groove

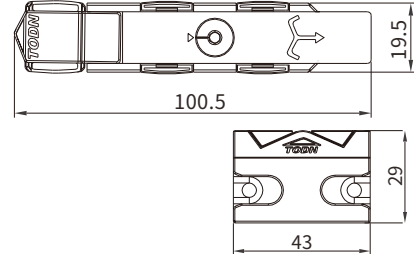

锁闭产品系列

Locking part series

产品名称: 单锁点四件套

Product name: Single lock four-piece set

产品型号: ISLF05

Product code: ISLF05

主要材质: 锌合金


Main material: zinc alloy

表面处理: 电镀

Surface treatment: plating

适用型材: C槽

Suitable profile: C groove

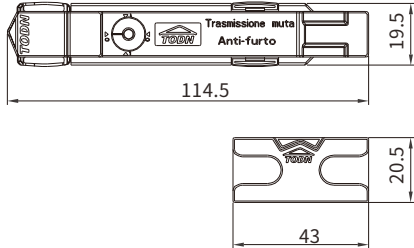

锁闭产品系列

Locking part series

产品名称: 单锁点四件套

Product name: Single lock four-piece set

产品型号: IKSLF05

Product code: IKSLF05

主要材质: 锌合金



ain material: zinc alloy

表面处理: 电镀

Surface treatment: plating

适用型材: K槽

Suitable profile: K groove

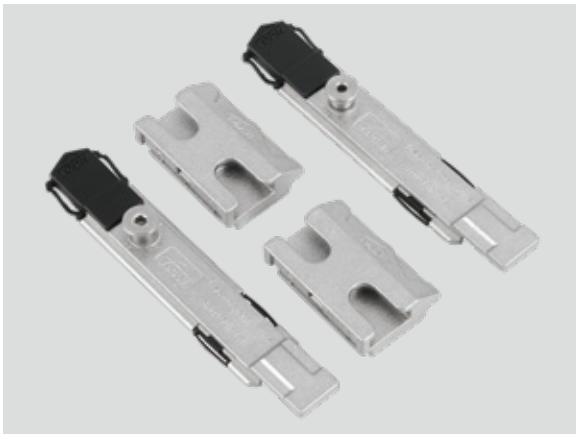
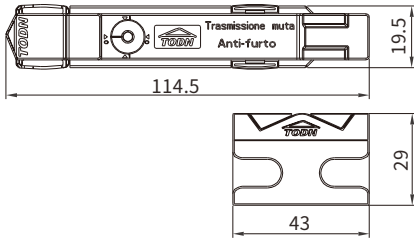


锁闭产品系列

Locking part series

产品名称: 中间锁块
Product name: mid locking plate
产品型号: IMLP01
Product code: IMLP01
主要材质: 锌合金
Main material: zinc alloy

表面处理: 电镀
Surface treatment: plating
适用型材: C槽
Suitable profile: C groove





锁闭产品系列

Locking part series

产品名称: 中间锁块
Product name: mid locking plate
产品型号: IKMLP01
Product code: IKMLP01
主要材质: 锌合金
Main material: zinc alloy

表面处理: 电镀
Surface treatment: plating
适用型材: K槽
Suitable profile: K groove





锁闭产品系列

Locking part series

产品名称: 支撑组件
Product name: Support components
产品型号: ISCT02
Product code: ISCT02
主要材质: 锌合金、POM
Main material: zinc alloy, POM

表面处理: 电镀
Surface treatment: plating
适用型材: C槽
Suitable profile: C groove





锁闭产品系列

Locking part series

产品名称: 支撑组件
Product name: Support components
产品型号: IKSCT02
Product code: IKSCT02
主要材质: 锌合金、POM
Main material: POM, Zinc alloy

表面处理: 电镀
Surface treatment: plating
适用型材: K槽
Suitable profile: K groove





锁闭产品系列

Locking part series

产品名称: 边传动杆
Product name: side transmission rod
产品型号: ISTR03
Product code: ISTR03

主要材质: 锌合金
Main material: zinc alloy
表面处理: 电镀
Surface treatment: plating

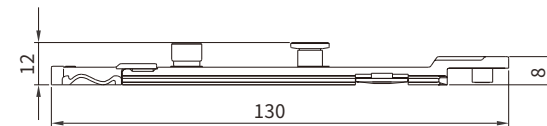


锁闭产品系列

Locking part series

产品名称: 边传动杆
Product name: side transmission rod
产品型号: ISTR05
Product code: ISTR05


主要材质: 锌合金
Main material: zinc alloy
表面处理: 电镀
Surface treatment: plating

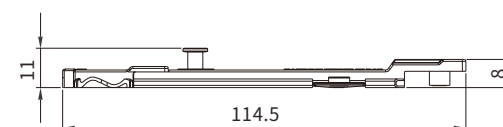

锁闭产品系列

Locking part series



产品名称:边传动杆
Product name: side transmission rod
产品型号:ISTR04
Product code: ISTR04
主要材质:SUS304
Main material: SUS304
表面处理:拉丝
Surface treatment: hairline

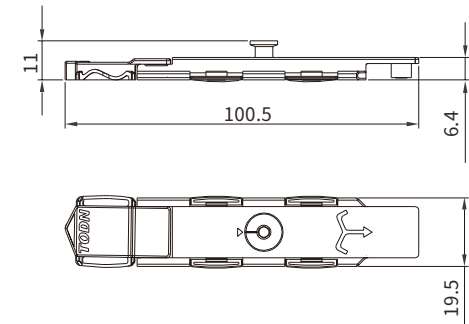

锁闭产品系列

Locking part series


产品名称:转接杆
Product name: mid transmission rod
产品型号:ICTR01
Product code: ICTR01
主要材质:锌合金
Main material: zinc alloy
表面处理:电镀
Surface treatment: plating

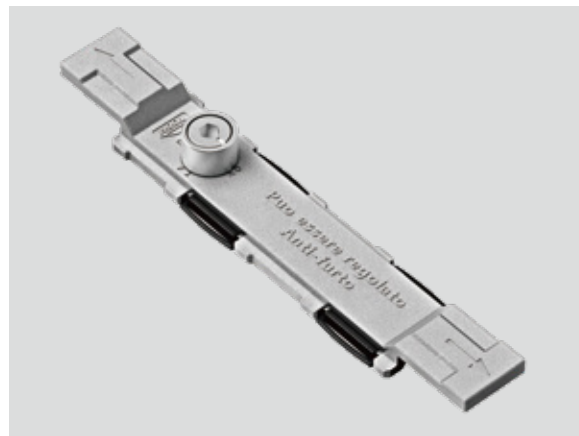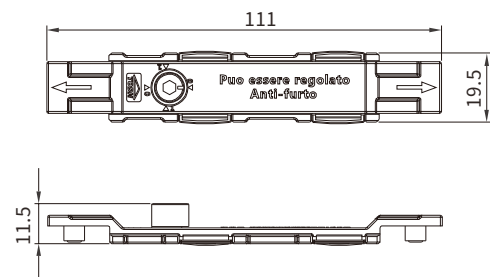

锁闭产品系列

Locking part series


产品名称:主传动杆
Product name: main transmission rod
产品型号:IMTR0512(23, 28)
Product code: IMTR0512 (23, 28)
主要材质:锌合金
Main material: zinc alloy
表面处理:电镀
Surface treatment: plating
外露长度:L可定制
Exposed length: L(customized)

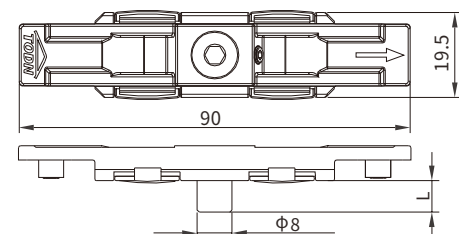

锁闭产品系列

Locking part series


产品名称:锁块
Product name:locking plate
产品型号:ILP05
Product code: ILP05
主要材质:锌合金
Main material:zinc alloy
表面处理:电镀
Surface treatment: plating
适用型材:C槽
Suitable profile: C groove

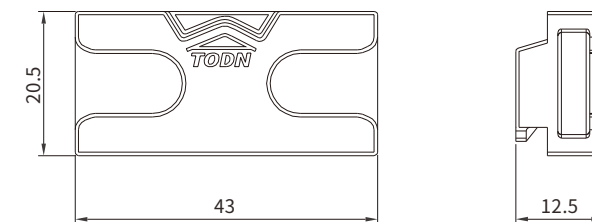

锁闭产品系列

Locking part series


产品名称:锁块
Product name:locking plate
产品型号:IKLP05
Product code: IKLP05
主要材质:锌合金
Main material:zinc alloy
表面处理:电镀
Surface treatment: plating
适用型材:K槽
Suitable profile: K groove

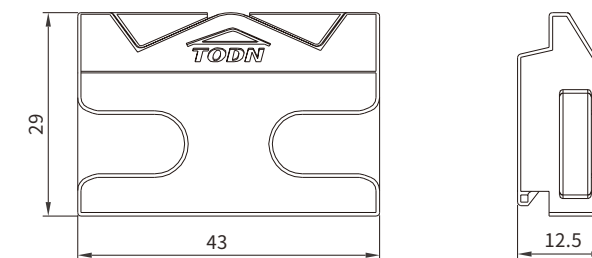

锁闭产品系列

Locking part series

产品名称:锁块
Product name:locking plate
产品型号:ILP04
Product code: ILP04
主要材质:SUS304
Main material:SUS304
表面处理:拉丝
Surface treatment: hairline
适用型材:C槽
profile: C groove

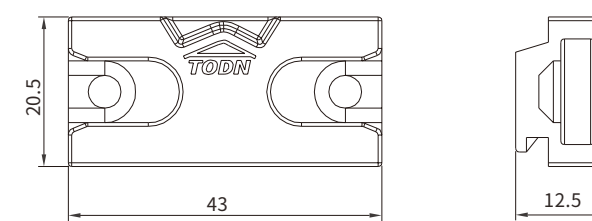


锁闭产品系列

Locking part series

产品名称:锁块
Product name:locking plate
产品型号:IKLP04
Product code:IKLP04
主要材质:SUS304
Main material: SUS304

表面处理:拉丝
Surface treatment:hairline
适用型材:K槽
Suitable profile: K groove

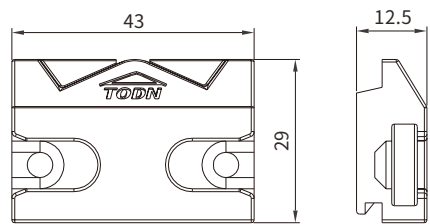


锁闭产品系列

Locking part series

产品名称:锁块
Product name:locking plate
产品型号:ILP03R(分左右)
Product code: ILP03R (left&right)
主要材质:锌合金
Main material:zinc alloy

表面处理:电镀
Surface treatment: plating
适用型材:C槽
Suitable profile: C groove

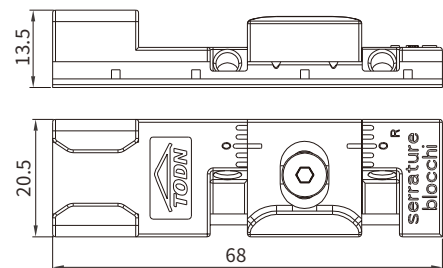


锁闭产品系列

Locking part series

产品名称:锁块
Product name:locking plate
产品型号:IKLP03R(分左右)
Product code: IKLP03R (left&right)
主要材质:锌合金
Main material:zinc alloy

表面处理:电镀
Surface treatment: plating
适用型材:K槽
Suitable profile: K groove

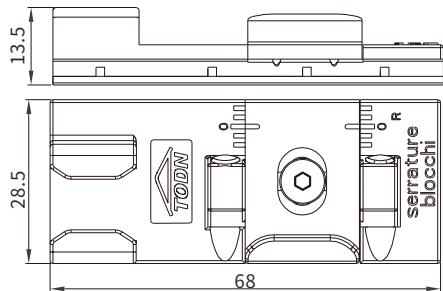


锁闭产品系列

Locking part series

产品名称:支撑块
Product name: supporting block
产品型号:ISB02
Product code: ISB02
主要材质:锌合金
Main material: zinc alloy

表面处理:电镀
Surface treatment: electroplating
适用型材:C槽
Suitable profile: C groove

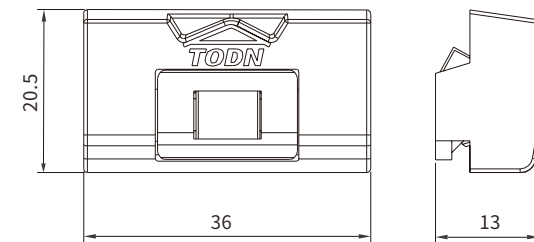


锁闭产品系列

Locking part series

产品名称:支撑块
Product name: supporting block
产品型号:IKSB03
Product code: IKS03
主要材质:锌合金
Main material: zinc alloy

表面处理:电镀
Surface treatment: electroplating
适用型材:K槽
Suitable profile: K groove

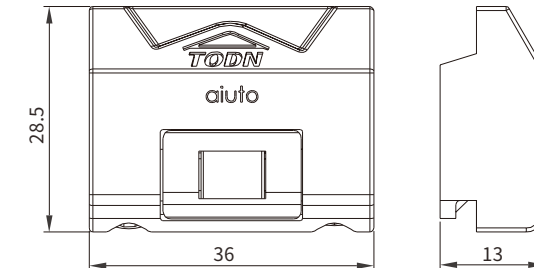


锁闭产品系列

Locking part series


产品名称:垫块
Product name: supporting block
产品型号:ICB01
Product code: ICB01

主要材质:POM
Main material: POM
表面处理:磨砂
Surface treatment: matte

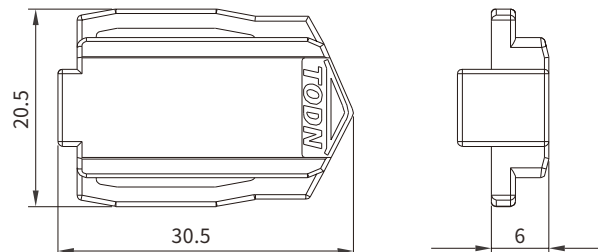

连接产品系列

Connector Product Series

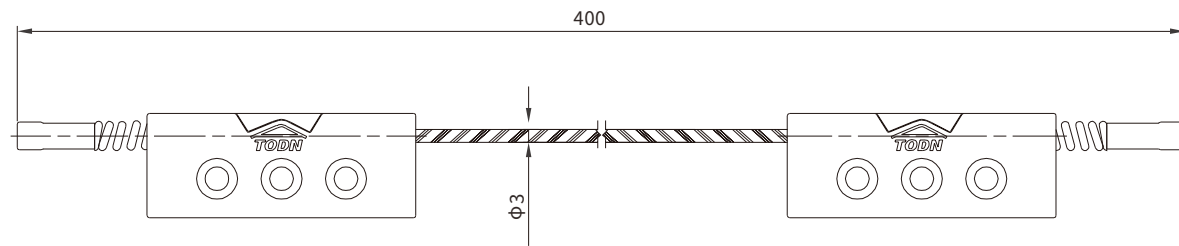

产品名称:防坠器

Product name:safety disengagement preventer

产品型号:ISDP01R(分左右)

Product code: ISDP01R (left&right)

抗拉强度:600kg

Tensile strength: 600kg

表面处理:喷丸

Surface treatment: shot blasting

产品材质:SUS304


Product material: SUS304

适用型材:C槽

Suitable profile: C groove


产品左右说明:人站室内,窗户向外开,安装在左边为左式,安装在右边为右式。

Product left and right instructions: People stand indoors,the windows open outwards, and the left side is installed on the left. Installed on the right is the right type.

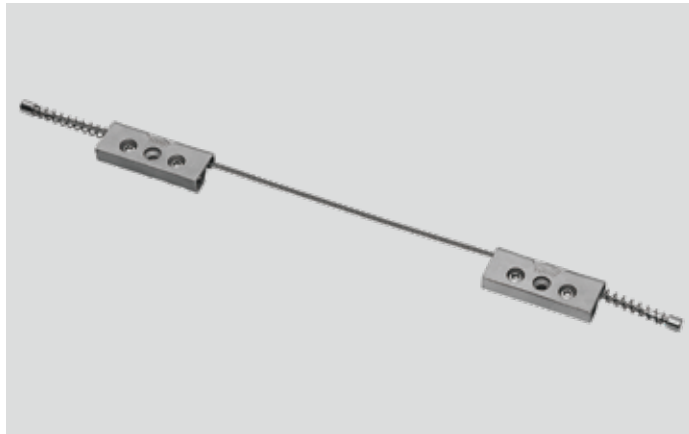

连接产品系列

Connector Product Series

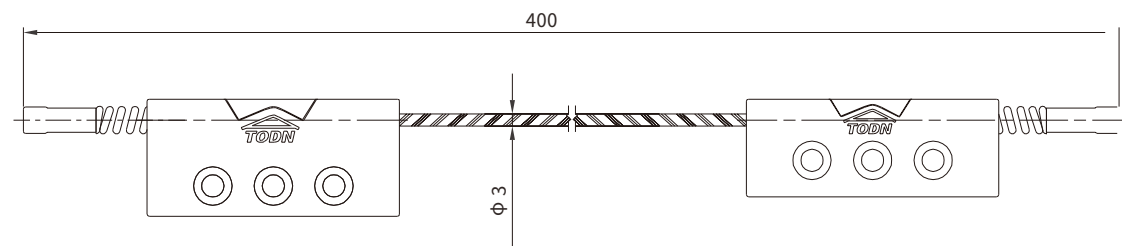

产品名称:防坠器

Product name:safety disengagement preventer

产品型号:IKSDP01R(分左右)

Product code: IKSDP01R (left&right)

抗拉强度:600kg

Tensile strength: 600kg

表面处理:喷丸

Surface treatment:shot blasting

产品材质:SUS304


Product material: SUS304

适用型材:K槽

Suitable profile:Kgroove



产品左右说明:人站室内,窗户向外开,安装在左边为左式,安装在右边为右式。

Product left and right instructions: People stand indoors, the windows openoutwards, and the left side is installed on the left. Installed on the right is the right type

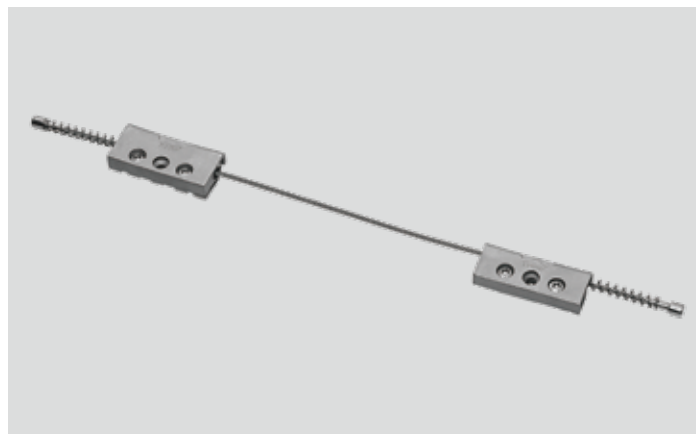


门锁系列
Door lock series

中心距L Hole distance L	高度A Height A	型号 Code	锁面板搭配 Suitable locking plate
30mm	45mm	IDL01030	IFP01
35mm	50mm	IDL01035	

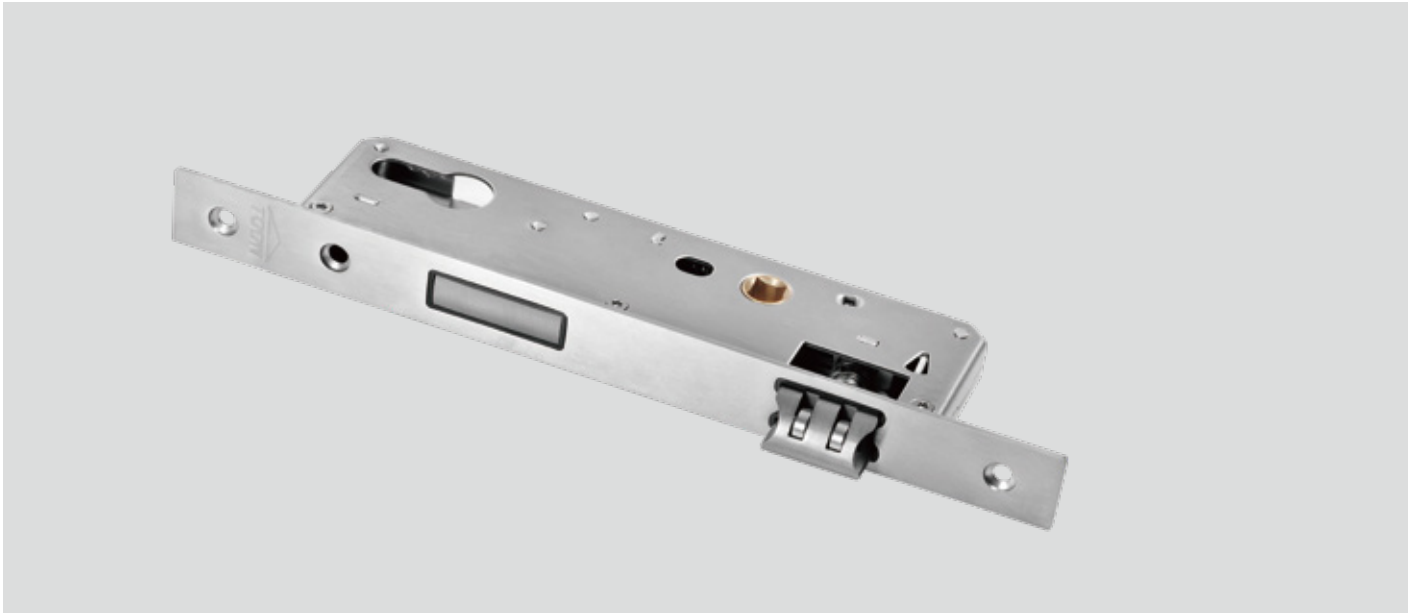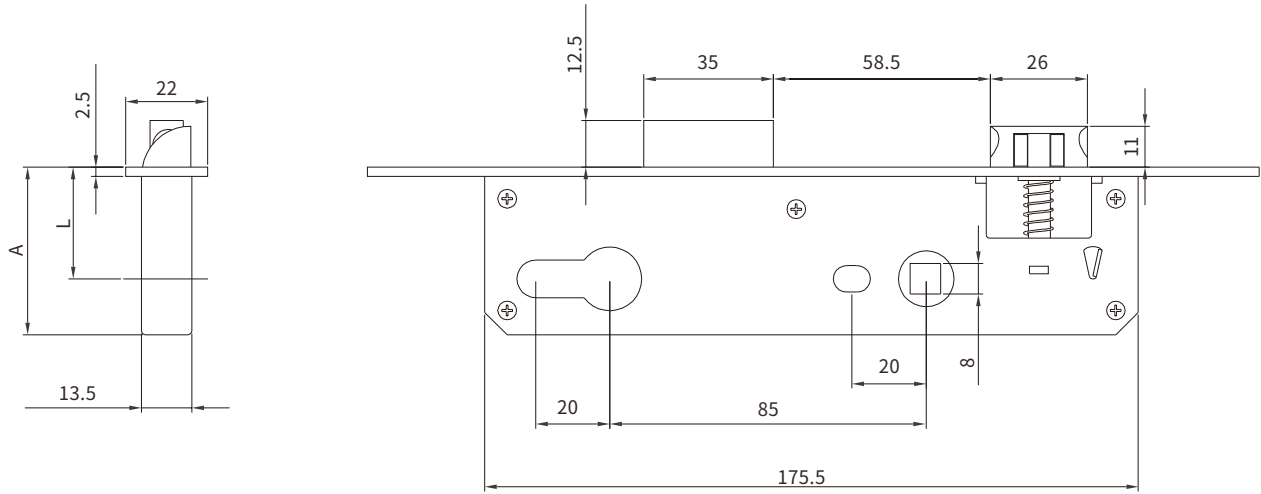

门锁系列
Door lock series




中心距L Hole distance L	高度A Height A	型号 Code	锁面板搭配 Suitable locking plate
30mm	46mm	IDL02030	IFP02
34mm	50mm	IDL02034	

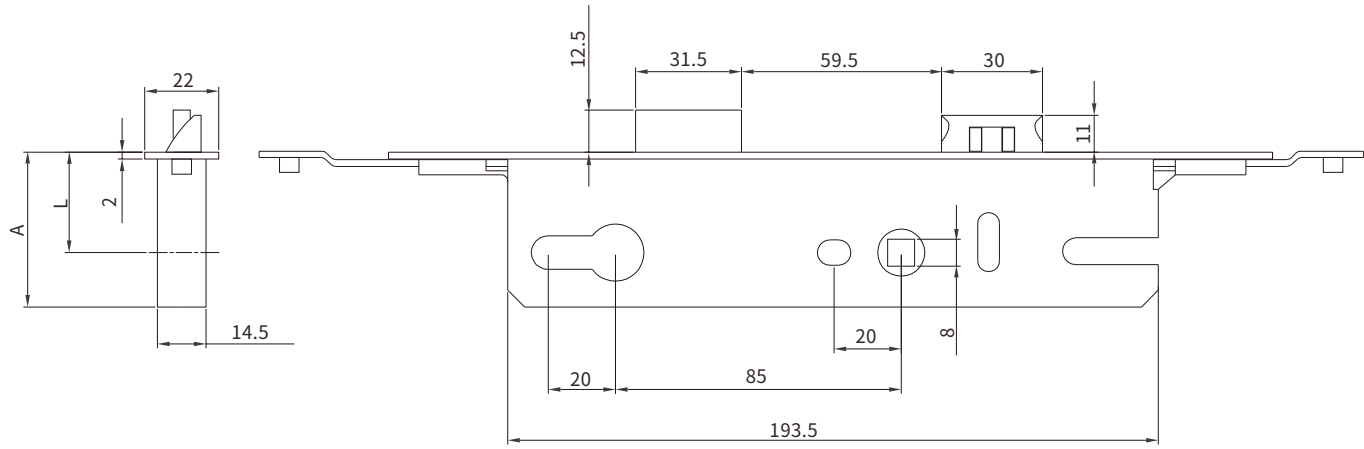

锁面板系列



Locking Plate Series

锁面板 Locking Plate	门锁搭配 Suit for locking plate
IFP01	IDL01030、IDL01035
IFP02	IDL02030、IDL02034

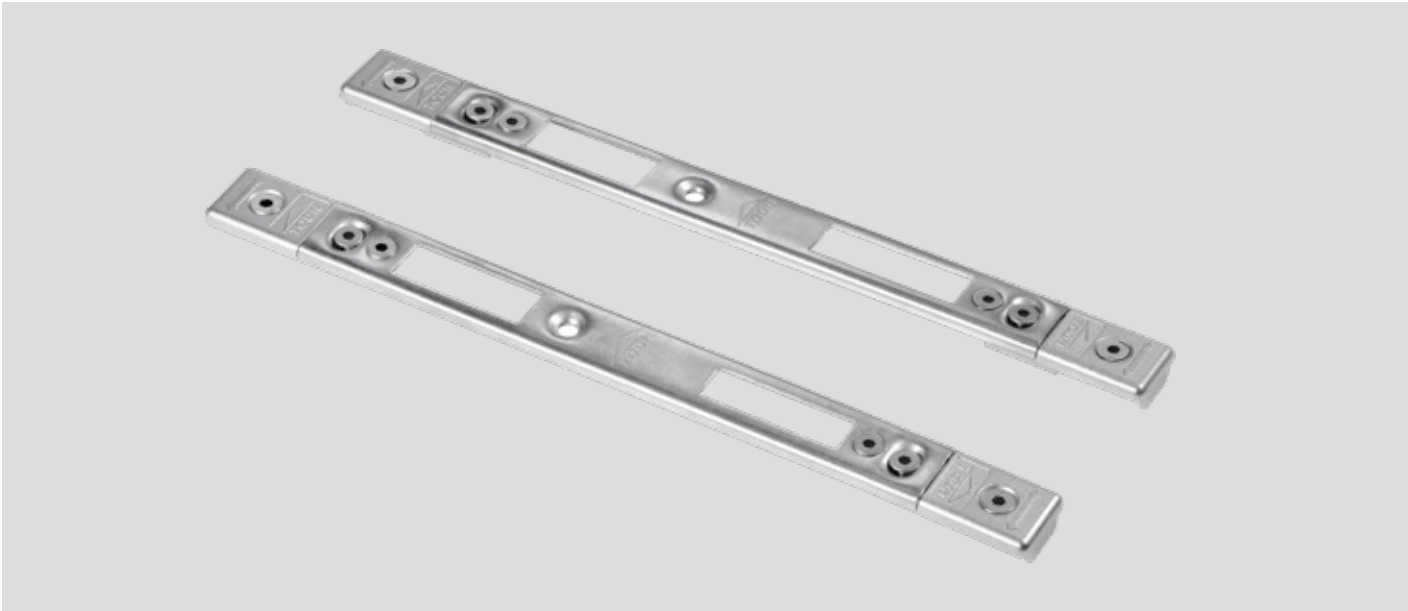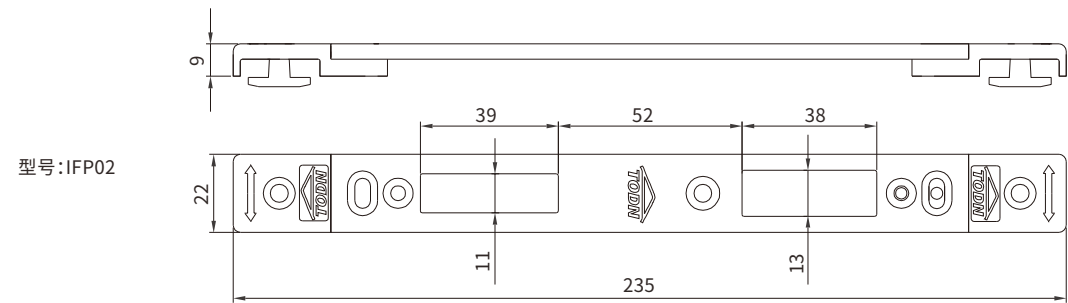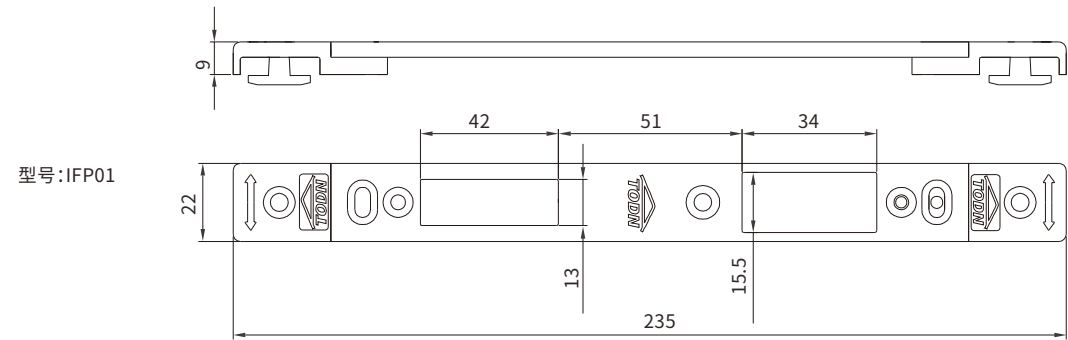

传动器、执手开孔示意图

Transmitter&Handle Drilling Diagram

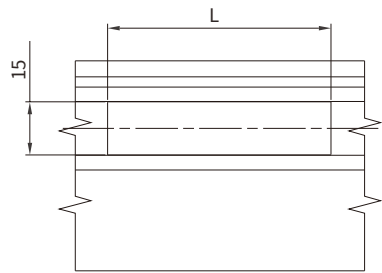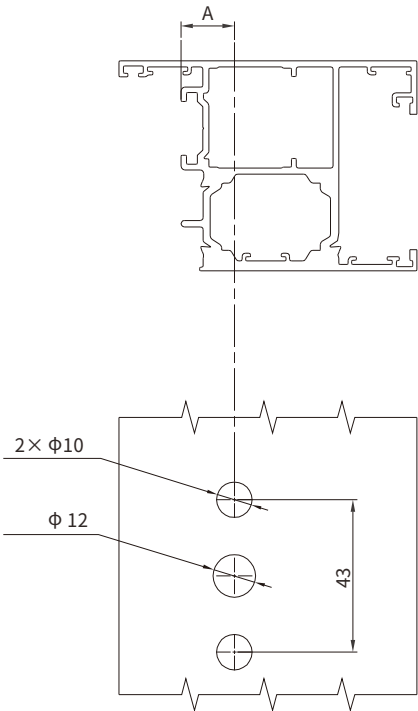

产品型号 Product Code	中心距A Hole Distance A	长度L Length L
IDG01	15mm	64mm
IDG02	23.5mm	75.5mm
IDG03	29.5mm	75.5mm
ISG01	11mm	85mm
ISG02	24mm	85mm
ISG03	30mm	85mm
ISG04	35mm	85mm

外平开窗纱一体窗样品箱

Sample box of open-out casement screen window



型号: IYXT02 (配古铜色执手)
Code: IYXT02 (with bronze handle)
型号: IYXY02 (配银灰色执手)
Code: IYXY02 (with silver gray handle)

产品名称 Product Name	产品型号 Product Code	数量 QTY	备注 Mark
箱子 Box	TDS03	1	
执手 Handle	IH00225	1	可选古铜或银灰两色(可选配) Green bronze, silver gray is optional
执手 Handle	IHS003	1	可选古铜或银灰两色(可选配) Green bronze, silver gray is optional
传动器 Transmitter	IDG02	1	中心距23.5mm Center distance 23.5mm
不锈钢传动器 SS Transmitter	ISG02	1	中心距24mm Center distance 24mm
滑撑 Friction	IFS100R\R	1	一支, 右式 One pcs, right type
滑撑 Friction	IFS200R	1	一支, 右式 One pcs, right type
纱窗隐藏式合页 Concealed screen hinge	ICH200L\L	1	一支, 右式 One pcs, right type
边传动杆 Side transmission rod	ISTR03	1	
边传动杆 Side transmission rod	ISTR04	1	
边传动杆 Side transmission rod	ISTR05	1	
锁块 Locking plate	ILP03R	1	适用C槽 Suitable for C groove
锁块 Locking plate	ILP04	1	适用C槽 Suitable for C groove
锁块 Locking plate	ILP05	1	适用C槽 Suitable for C groove
防坠器 Locking plate	ISDP01R	1	适用C槽, 右式 Suitable for C groove, right type