
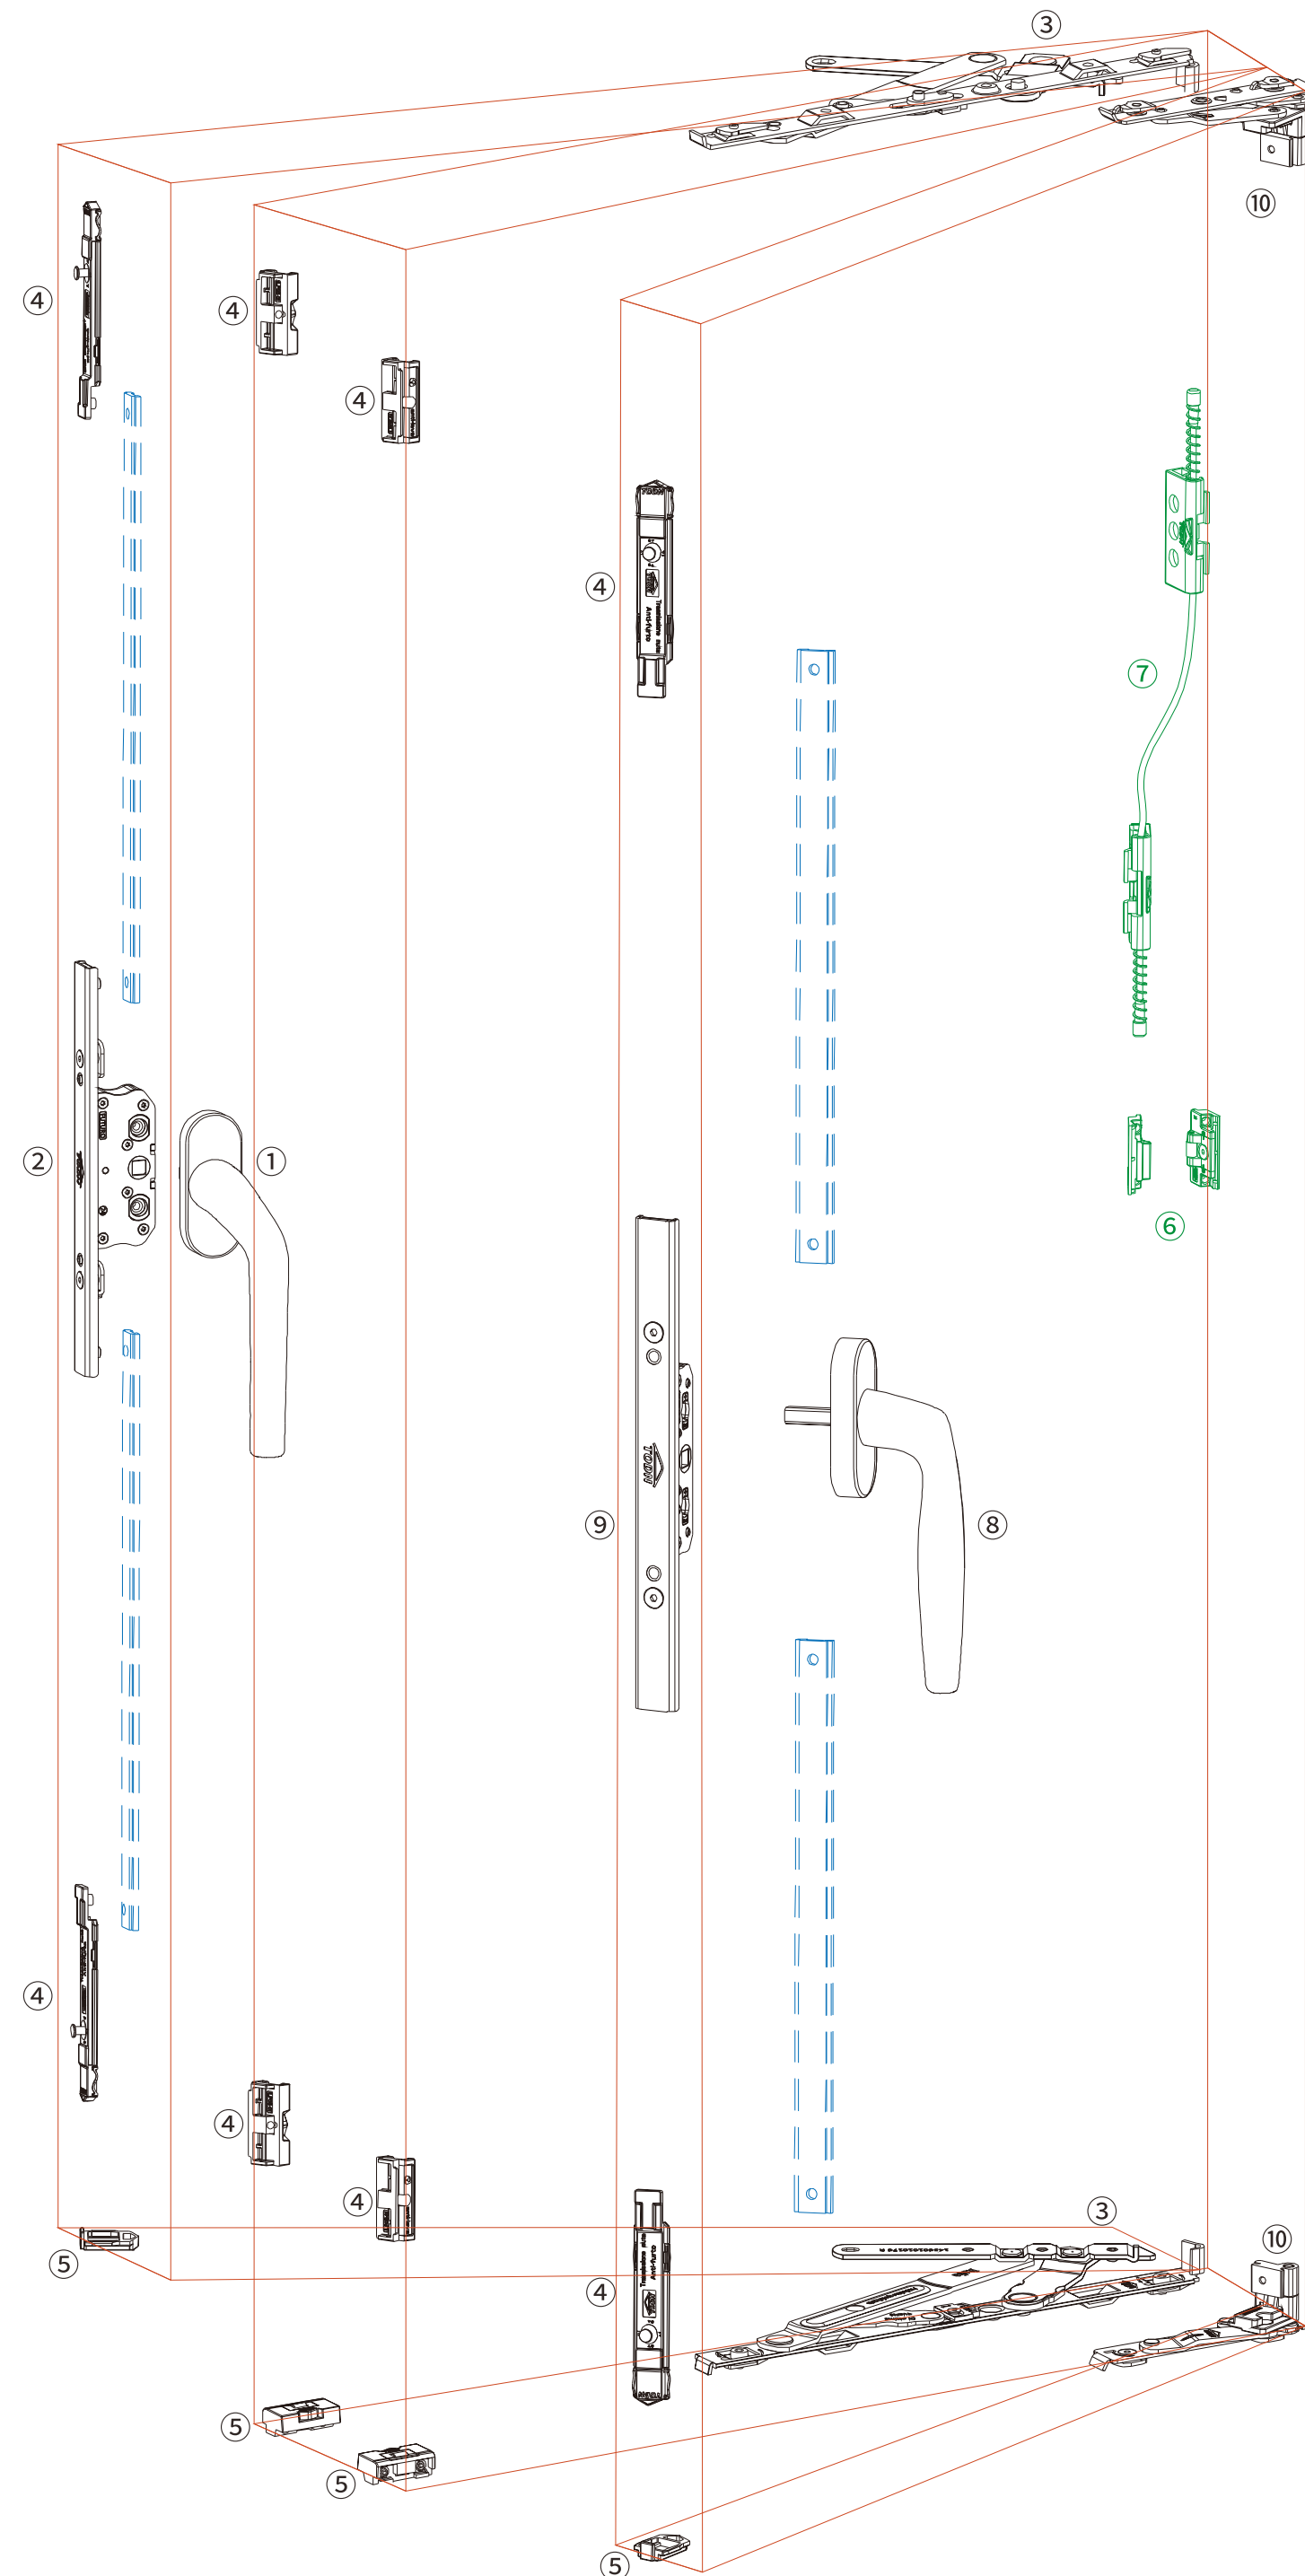


IW200 外平开窗纱一体系列

IW200 Open-out Side Hung Window With Screen Window Series

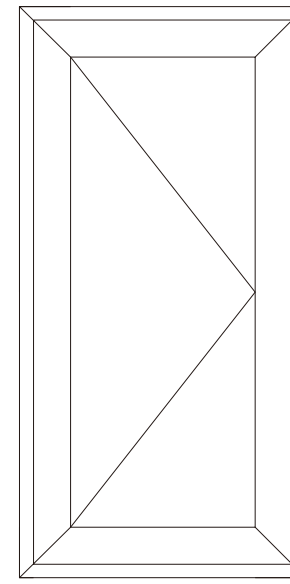

IW200 外平开窗纱一体系列

IW200 Open-out Side Hung Window With Screen Window Series

玻璃窗/Glass window				
序号/No.	名称/Name	型号/Code	数量/QTY	备注/Mark
1	执手 Handle	IHS00340R	1	分左右,方钢外露40mm Left&Right, Exposed spindle length 40mm
2	不锈钢传动器 SS Transmitter	ISG02	1	中心距24mm Center distance 24mm
3	滑撑 Friction stay	IFS200\LR	1	
4	单锁点四件套 Single lock four-piece set	ISLF05	1	
5	支撑组件 Support components	ISCT02	1	
6	中间锁块 Mid locking plate	IMLP01	1	选配 Optional
7	防坠器 Fall arrester	ISDP01R	1	分左右,选配 Left&Right, Optional

纱窗/Screen window				
序号/No.	名称/Name	型号/Code	数量/QTY	备注/Mark
8	执手 Handle	IH00225	1	方钢外露25mm Exposed spindle length 25mm
9	不锈钢传动器 SS Transmitter	ISG01	1	中心距11mm Center distance 11mm
4	单锁点四件套 Single lock four-piece set	ISLF05	1	
5	支撑组件 Support components	ISCT02	1	
10	纱窗隐藏式合页 Concealed hinge for screen window	ICH200\LR	1	

配置说明:  
Configuration instructions

- 1、本配置适用窗扇高度为1500mm,窗扇宽度650mm以内的窗型。  
This configuration is suitable for window sash height of 1500mm and window sash width within 650mm.
- 2、滑撑最大承重60kg,建议窗型比(高/宽)保持在1.5:1。  
The maximum load-bearing capacity of sliding brace is 60kg, and it is recommended that the window ratio (height/width) be maintained at 1.5:1
- 3、纱窗合页最大承重15kg。  
The maximum load-bearing capacity of the screen hinge is 15kg
- 4、本配置适用C槽型材。  
This configuration is suitable for C-groove profiles.