


IN100 内平开窗纱一体系列

IN100Open-in Side Hung Window With Screen Window Series

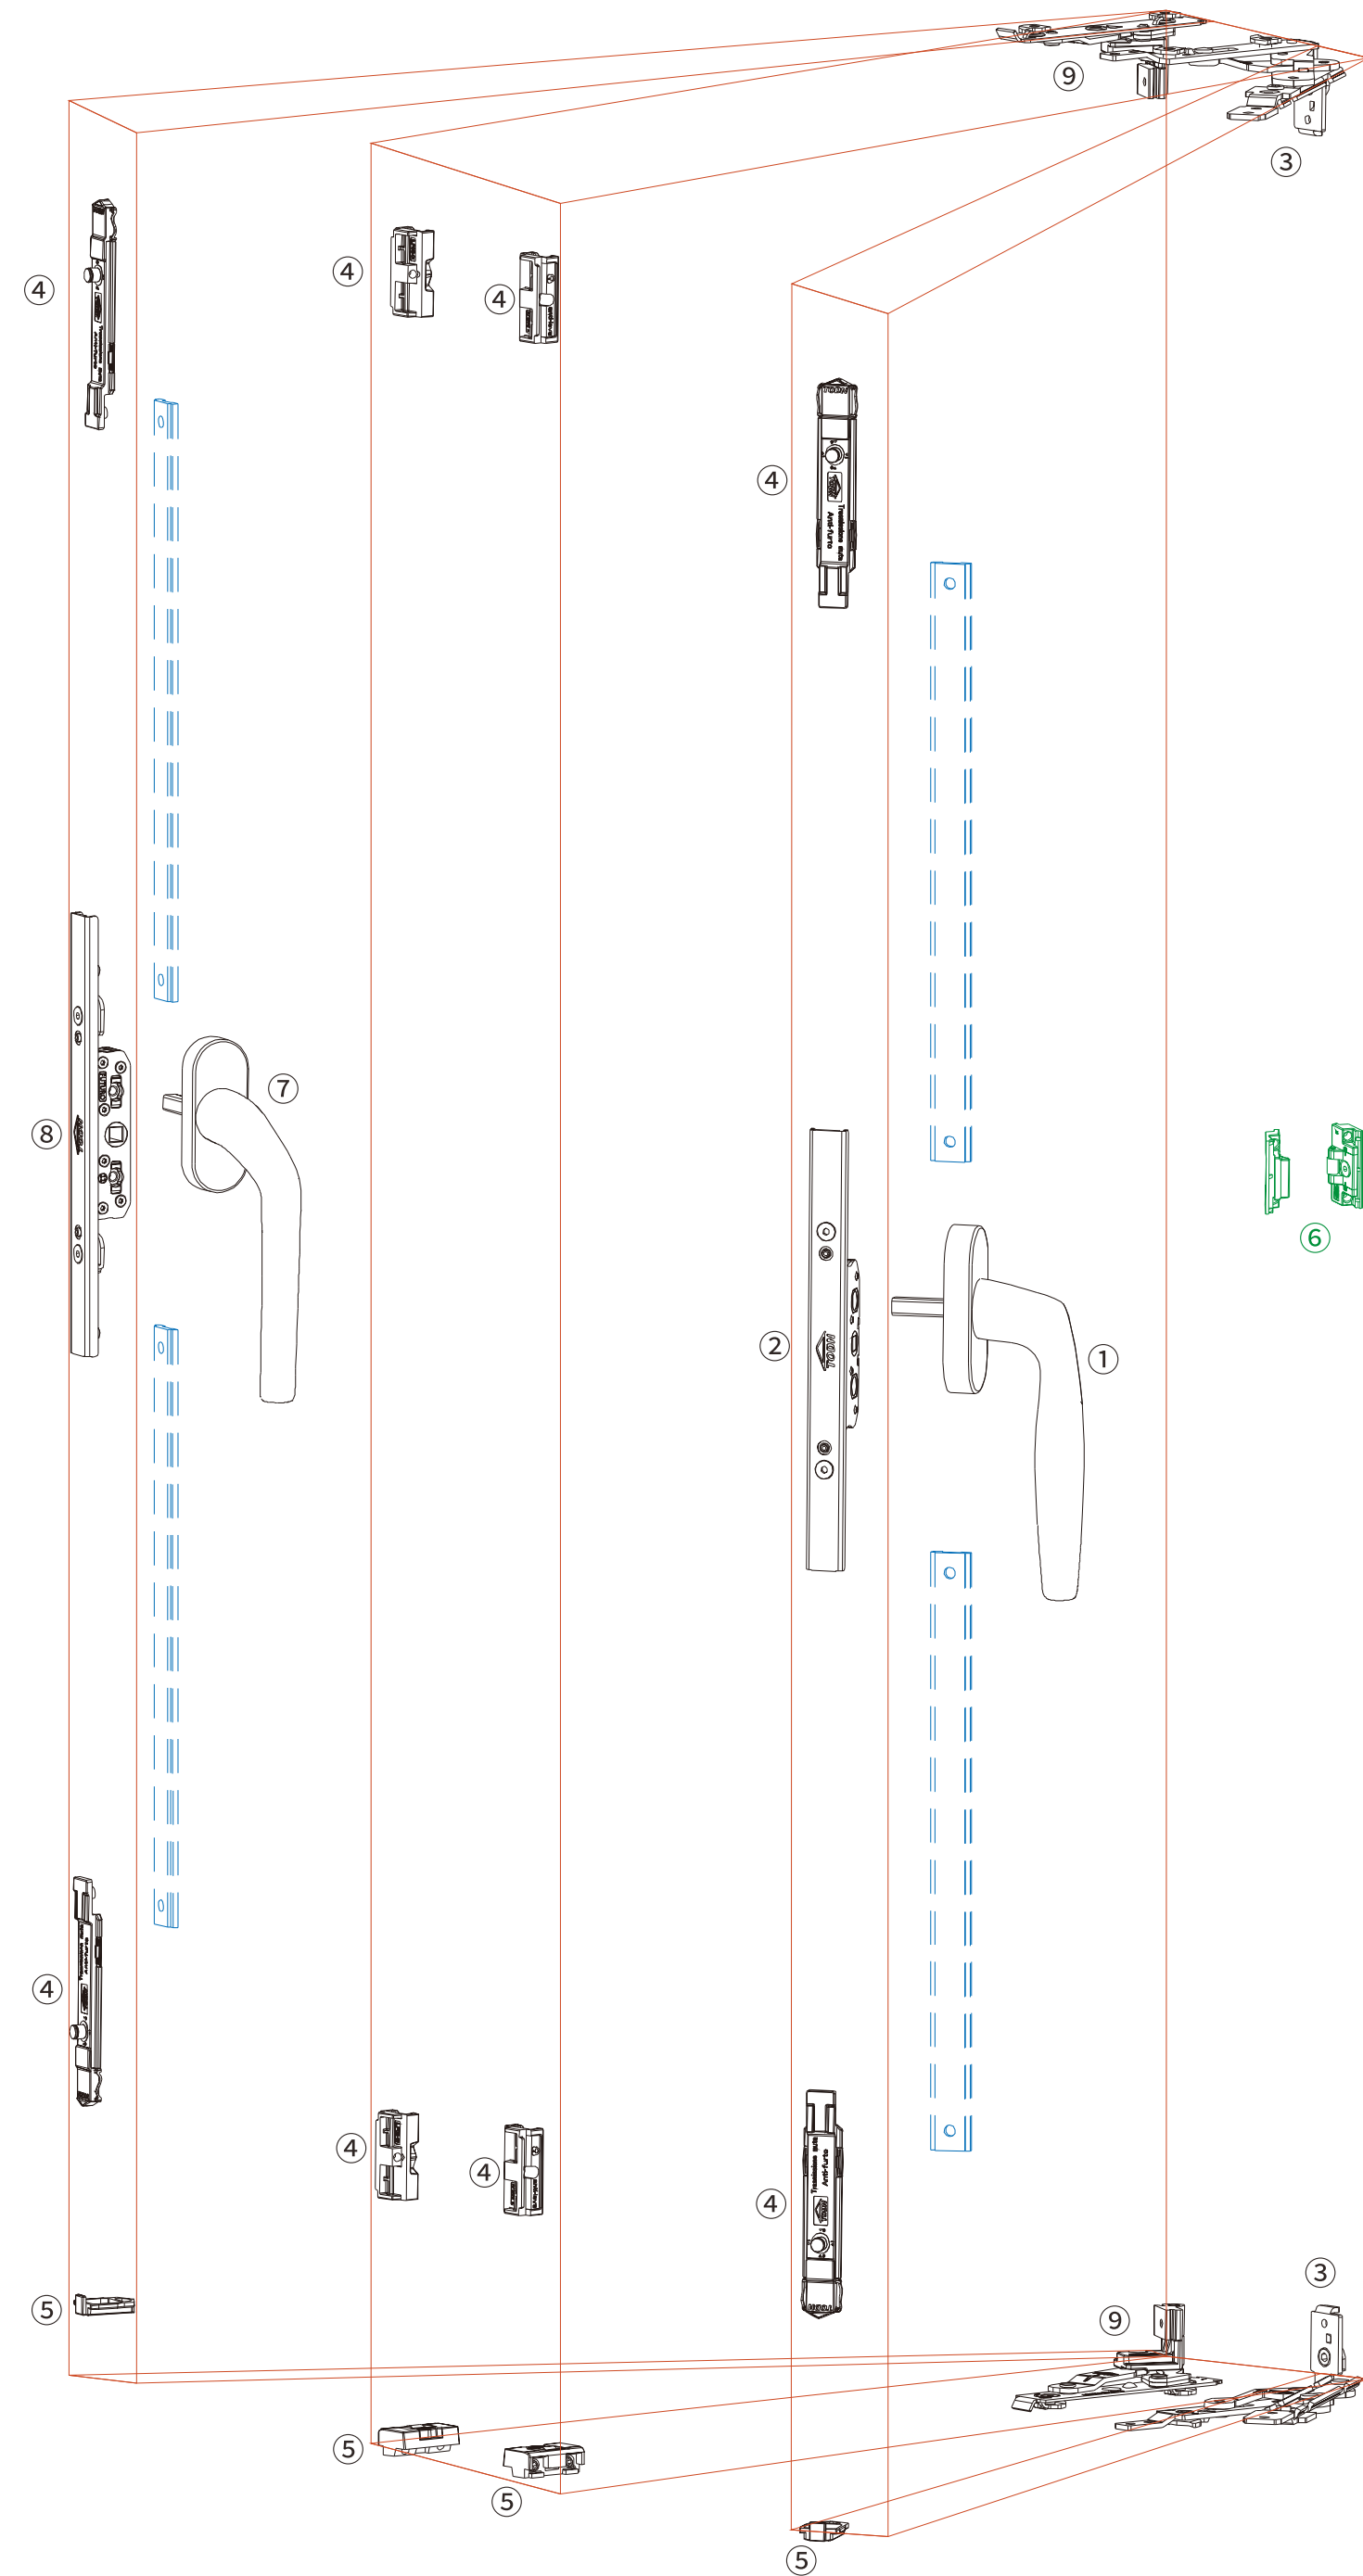

IN100 内平开窗纱一体系列

IN100Open-in Side Hung Window With Screen Window Series

玻璃窗/Glass window				
序号/No.	名称/Name	型号/Code	数量/QTY	备注/Mark
1	执手 Handle	IH00225	1	方钢外露25mm Exposed spindle length 25mm
2	不锈钢传动器 SS Transmitter	ISG01	1	中心距11mm Center distance 11mm
3	隐藏式合页 Concealed hinge	ICH100\LR	1	
4	单锁点四件套 Single lock four-piece set	ISLF05	1	
5	支撑组件 Support components	ISCT02	1	
6	中间锁块 Mid locking plate	IMLP01	1	选配 Optional

纱窗/Screen window				
序号/No.	名称/Name	型号/Code	数量/QTY	备注/Mark
7	执手 Handle	IHS00325R	1	分左右,方钢外露25mm Exposed spindle length 25mm
8	不锈钢传动器 SS Transmitter	ISG02	1	中心距24mm Center distance 24mm
4	单锁点四件套 Single lock four-piece set	ISLF05	1	
5	支撑组件 Support components	ISCT02	1	
9	纱窗隐藏式合页 Concealed hinge for screen window	ICH200\LR	1	

配置说明:
Configuration instructions

- 1、本配置适用窗扇高度为1900mm,窗扇宽度800mm以内的窗型。
This configuration is suitable for window sash height of 1900mm and window sash width within 800mm.
- 2、隐藏合页最大承重50kg,建议窗型比(高/宽)保持在1.5:1。
The maximum load-bearing capacity of sliding brace is 50kg, and it is recommended that the window ratio (height/width) be maintained at 1.5:1.
- 3、纱窗合页最大承重15kg。
The maximum load-bearing capacity of the screen hinge is 15kg
- 4、本配置适用C槽型材。
This configuration is suitable for C-groove profiles.